

Grade Control Drilling Strengthens Confidence in Bullabulling Resource

New results include 1.1m @ 290g/t Au from 170m at Bacchus and 7m @ 10.9g/t Au from 7m at Phoenix

Minerals 260 Limited (ASX:MI6) is pleased to report results from the ongoing infill, grade control and exploration drilling program at its 100%-owned 6.2Moz Bullabulling Gold Project, located 25km south-west of Coolgardie in Western Australia. Results have been received for a further 53 infill and extensional drill holes totalling 11,674m, and 320 grade control drill holes totalling 25,970m.

Results reported in this announcement are from grade control drilling at the Phoenix deposit and infill and extensional drilling at the Phoenix, Bacchus, Kraken and Dicksons deposits.

Drilling continues to:

- Confirm the continuity of mineralisation within the 6.2Moz Mineral Resource Estimate (MRE), as well as extensions beyond the MRE boundaries;
- Strengthen confidence in the MRE with results from the initial grade control drilling consistent with MRE modelling;
- Intersect thick and high-grade mineralisation within the footwall lodes at Phoenix and Bacchus;
- Intersect shallow high-grade mineralisation at Phoenix;
- Support the upgrade of Inferred Resources to Indicated;
- Enhance the Company's understanding of the structural controls on mineralisation; and
- Identify opportunities for further resource growth.

Highlights

Better results include:

Phoenix Deposit (74Mt @ 0.95g/t Au for 2,300koz Au)

Grade Control

- **21m @ 3.4g/t Au from 27m in BBGC0026***, including:
 - 1m @ 52.6g/t Au from 36m
- **7m @ 10.9g/t Au from 7m in BBGC0070***, including:
 - 2m @ 35.4g/t Au from 7m
- **11m @ 9.0g/t Au from 49m in BBGC0123***, including:
 - 2m @ 44.8g/t Au from 49m
- **6m @ 17.1g/t Au from 19m in BBGC0267***, including:
 - 2m @ 45.0g/t Au from 20m
- **6m @ 10.0g/t Au from 22m in BBGC0285***, including:
 - 2m @ 24.0g/t Au from 23m
- **22m @ 1.1g/t Au from 66m in BBGC0304***

- **21m @ 2.0g/t Au from 58m in BBGC0305*, including:**
 - 1m @ 23.9g/t Au from 63m
- **23m @ 1.1g/t Au from 56m in BBGC0306***
- **13m @ 1.0g/t Au from 19m in BBGC0316**

Infill

- **14m @ 1.2g/t Au from 109m in BBRC0689***
- **9m @ 1.6g/t Au from 50m in BBRC0712***
- **14m @ 1.0g/t Au from 142m, 5m @ 3.8g/t Au from 206m & 15m @ 1.9g/t Au from 254m in BBRC0733*, including:**
 - 1m @ 12.8g/t Au from 209m
- **15.2m @ 1.5g/t Au from 74.1m in STDD005*, including:**
 - 0.5m @ 10.2g/t Au from 85.7m
 - 0.2m @ 18.1g/t Au from 88.2m
- **2.6m @ 3.7g/t Au from 142m in STDD007*, including:**
 - 0.3m @ 16.5g/t Au from 141.9m

Extensional

- **8m @ 1.0g/t Au from 354m in BBRD0009*¹**
- **5m @ 2.8g/t Au from 412m in BBRD0693*¹**

Bacchus Deposit (72Mt @ 1.0g/t Au for 2,400koz Au)

Infill

- **7m @ 4.3g/t Au from 246m in BBRD0306*¹, including:**
 - 0.8m @ 26.9g/t Au from 247m
- **1.1m @ 290g/t Au from 170m & 6.5m @ 2.3g/t Au from 270m in BBRD0538*¹**
- **8.5m @ 1.1g/t Au from 170m in BBRD0543*¹**
- **5m @ 3.1g/t Au from 100m in BBRC0734***

Extensional

- **10m @ 2.4g/t Au from 309m in BBRD0701*¹**

Kraken Deposit (16Mt @ 1.1g/t Au for 540koz Au)

Infill

- **7m @ 1.5g/t Au from 135m in BBRC0718***

Dicksons Deposit (22Mt @ 0.9g/t Au for 660koz Au)

Extensional

- **5m @ 1.8g/t Au from 19m in BBRC0735***
- **7m @ 1.2g/t Au from 83m in BBRC0736***
- **4m @ 2.3g/t Au from 284m in BBRC0751***

- * True widths are estimated at between 85% and 95% of the reported drillhole intercepts
- # True widths are estimated at between 70% and 85% of the reported drillhole intercepts
- ¹ Diamond tail results reported only. See previous ASX announcements for RC pre-collar significant intercepts

Details

Minerals 260 Limited (“Minerals 260” or the “Company”) (**ASX: MI6**) is pleased to report further results from ongoing drilling and exploration activities at its 100%-owned, 6.2Moz Bullabulling Gold Project (“Bullabulling” or the “Project”) located 25km south-west of Coolgardie in Western Australia (**Figure 6**).

Results in this Announcement are from:

- **Grade control drilling** at Phoenix in an area expected to be mined in the first three months of production;
- **Infill drilling** at the Phoenix, Bacchus, Kraken and Dicksons deposits, supporting the conversion of Inferred Resources to Indicated; and
- **Extensional drilling** at Phoenix, Bacchus, Kraken and Dicksons, targeting down-dip and strike extensions to the MRE, including high-grade mineralisation associated with the footwall shear zones.

See **Appendix 1** for a summary of the exploration results and **Appendix 2** for a summary of the grade control results included in this Announcement.

Grade Control

- Minerals 260 has completed its initial grade-control drilling program, on 10m × 10m spacing, comprising 320 Reverse Circulation (“RC”) holes for 25,970m across the Phoenix North and South areas.
- Preliminary analysis of the grade-control results, including detailed twin-hole comparisons (39 RC–RC pairs) and broader spatial comparisons, indicates that overall gold grades are consistent with the drilling underpinning the MRE and mineralised intercepts correlate well with the interpreted mineralisation within the MRE (**Figure 1**).
- Grade Control has provided improved definition of mineralisation reducing operational risk and improving confidence in the geological model.
- A second grade-control program will commence shortly, with results to support the Definitive Feasibility Study, ongoing grade-control strategy and Resource-to-Reserve evaluation.

Phoenix (74Mt @ 0.95g/t Au for 2,300koz Au)

In addition to grade control, drilling at Phoenix has focused on infill and depth-extension drilling along the western margins and beneath the MRE.

Infill drilling intersected multiple thick, stacked mineralised lodes, with notable results in BBRC0733, which returned 14m @ 1.0g/t Au from 142m, 5m @ 3.8g/t Au from 206m and 15m @ 1.9g/t Au from 254m. BBRC0689 also returned 14m @ 0.8g/t Au from 40m and 14m @ 1.2g/t Au from 109m (**Figure 2**).

Extensional drilling supports potential MRE growth, with BBRD0009 intersecting 8m @ 1.0g/t Au from 354m, directly beneath the MRE pit shell and 5m @ 2.8g/t Au from 412m intersected in BBRD0693, ~100m below the MRE pit shell.

Bacchus (72Mt @ 1.0g/t Au for 2,400koz Au)

Infill and extensional drilling at Bacchus intersected mineralisation above the average MRE grade across multiple lodes, supporting the interpreted continuity and the goal of converting Inferred Resources to Indicated.

The high-grade intercepts returned in BBRD0538 (1.1m @ 290g/t Au) and BBRD0546 (1m @ 35.8g/t Au) (**Figure 3**) highlight the presence of higher-grade zones within the broader mineralised system at Bacchus, discussed in further detail below. Additional drilling is planned to assess the geometry and continuity of these higher-grade zones and their potential materiality to the MRE.

High-Grade Trends

Analysis of drillhole intervals across mineralised domains has improved the definition of higher-grade trends within individual lodes, including northeast and northwest orientations. These higher-grade zones are counter to the general orientation of gold mineralisation in the MRE which is predominantly hosted within a series of north-south striking, west-dipping, stacked mineralised lodes.

Interpreted northeast and northwest-trending structural controls appear to influence the distribution of the higher-grade gold mineralisation and intersections between these trends may provide favourable sites for higher-grade gold concentrations, referred to as “jewellery boxes” (**Figure 4**).

A review of visible-gold occurrences has also identified spatial clustering that broadly aligns with these higher-grade trends, providing additional geological support for their interpreted orientation and structural position within the deposit.

The next phase of work is to determine the geological controls, continuity and significance of these higher-grade trends, including their relationships to the stacked lodes and their representation within the existing MRE block model.

Regional Exploration

A ground gravity survey has defined a continuous north-northwest trending gravity high that hosts the Bullabulling deposit and trends north of the MRE (**Figure 5**). South of the MRE, the stratigraphy rotates to a southeast trend, where several parallel gravity highs indicate multiple prospective greenstone units.

The change in orientation at Kraken is interpreted as a structural inflection - a setting known to be favourable for hosting gold mineralisation in the Eastern Goldfields.

The results from this survey have been used to generate further targets for drill testing.

Management Comment

Minerals 260's Managing Director, Luke McFadyen, said: *“These results reinforce our confidence in the scale and continuity of the 6.2Moz Bullabulling Mineral Resource, while highlighting opportunities to unlock additional value through further resource growth at depth and along strike.*

Results from our initial grade-control drilling strengthens our confidence in the Mineral Resource and improves our understanding of the mineralisation at a mining scale. Together with diamond drilling and ongoing geological studies, this work will support mine planning, grade-control design and the Definitive Feasibility Study.

Strong intersections at Phoenix and Bacchus, together with our improved understanding of the structural geological controls on higher-grade mineralisation, are helping us identify new opportunities both within and beyond the existing Resource to support growth.”

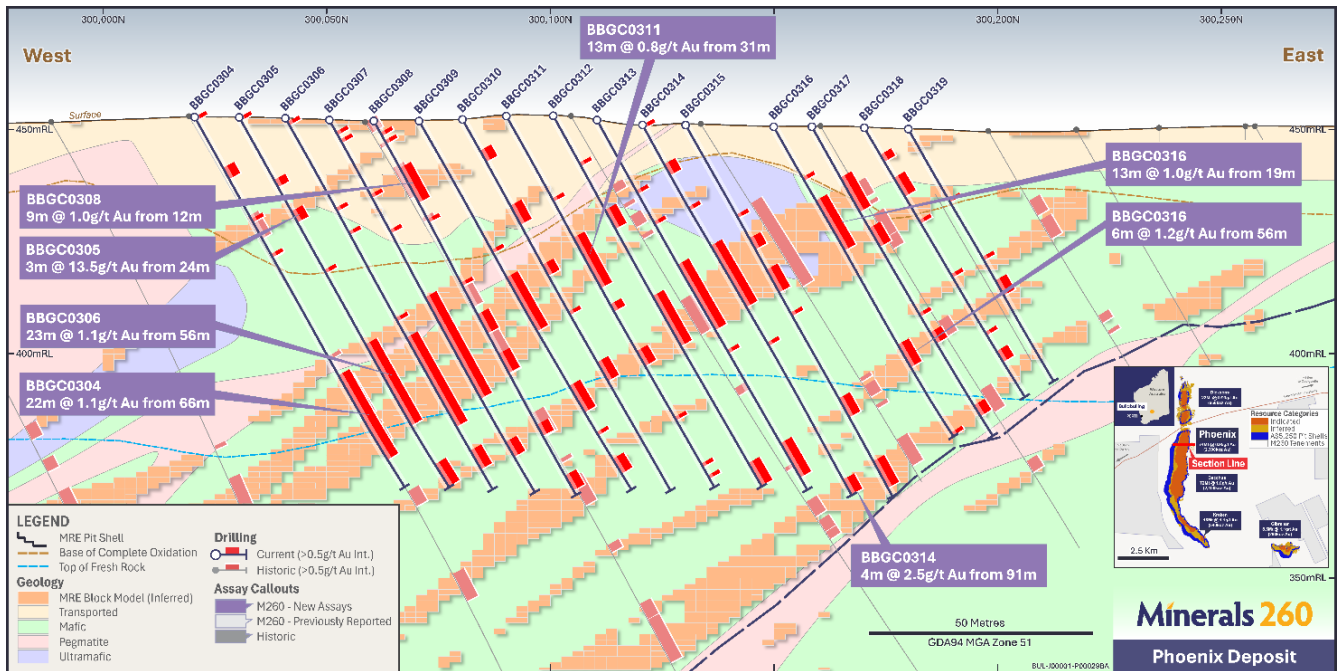


Figure 1: Section 6568350N showing mineralisation in grade control drilling testing the Phoenix MRE pit shell (new results in purple boxes)

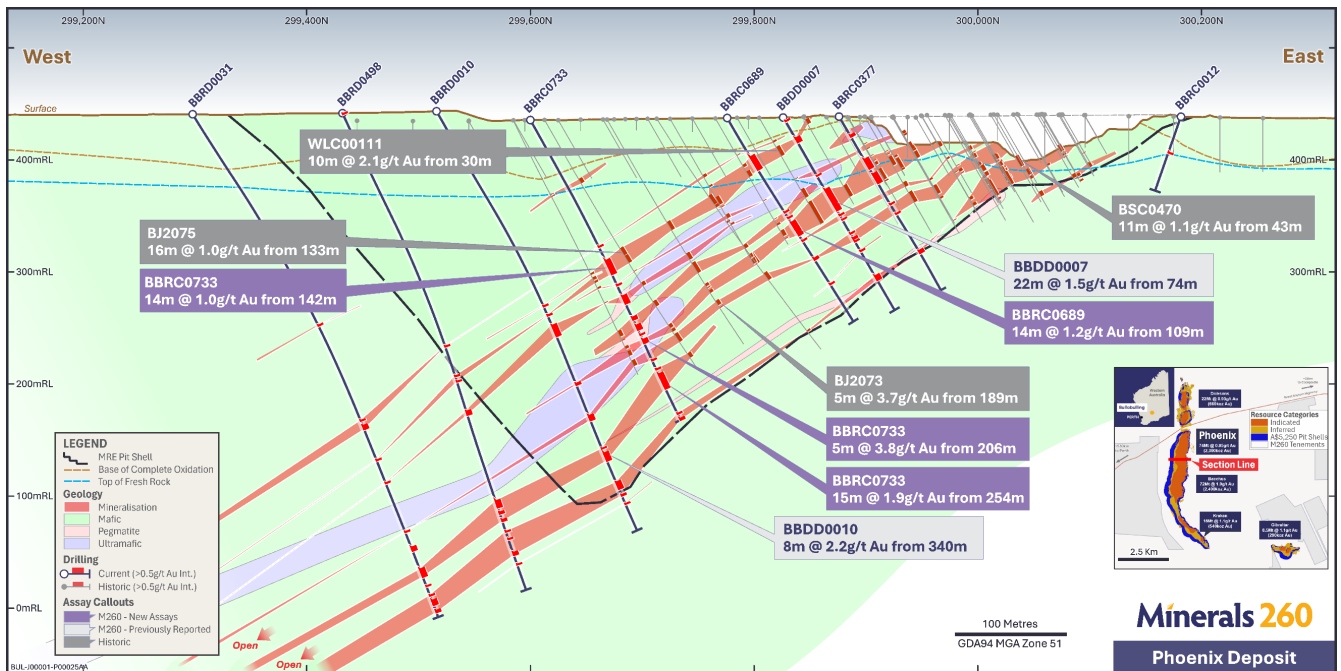


Figure 2: Section 6567680N showing mineralisation in BBRC0689 and BBRC0733 infilling Phoenix MRE pit shell (new results in purple boxes)

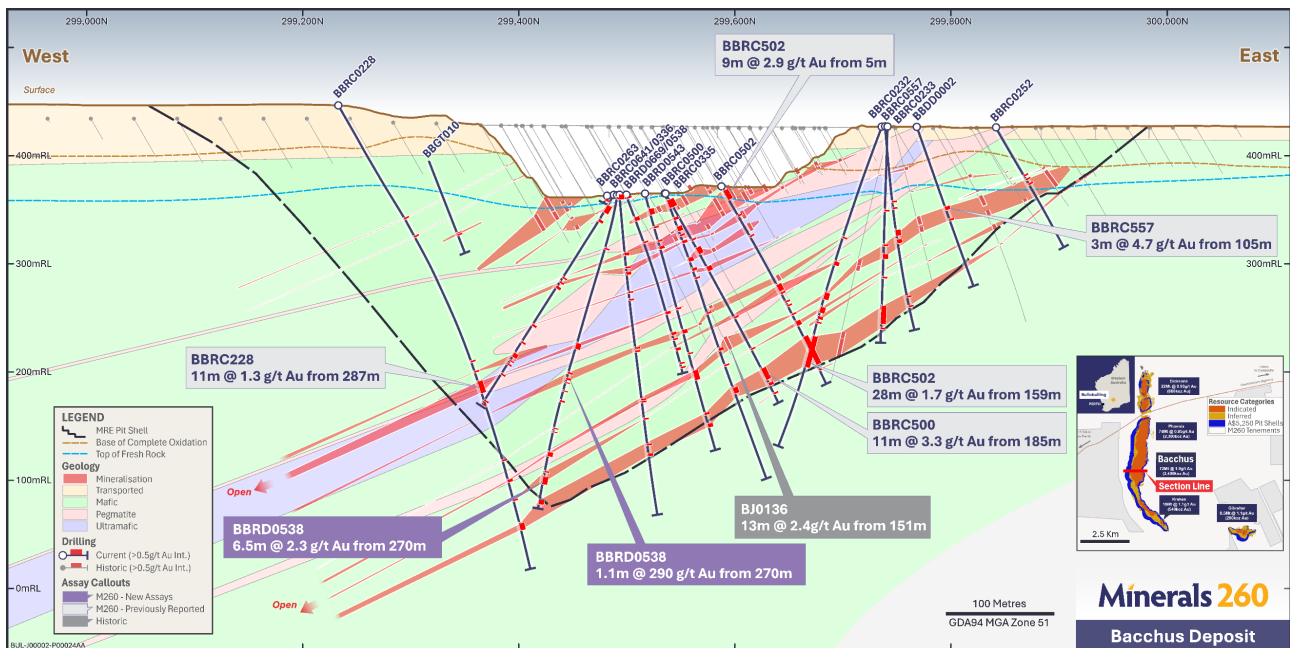


Figure 3: Section 6566330N showing mineralisation in BBRD0538 infilling Bacchus MRE pit shell (new results in purple boxes)

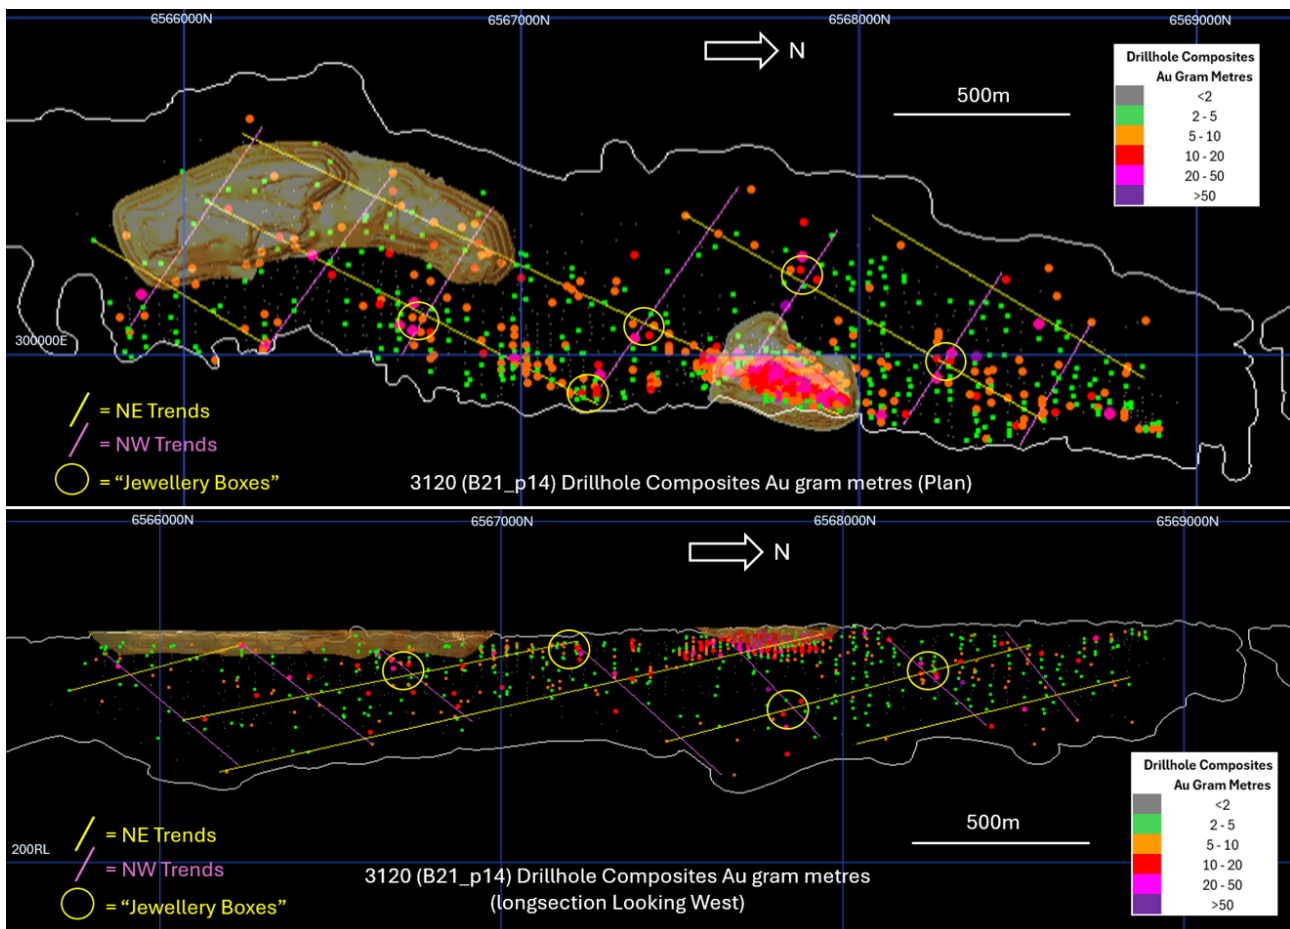


Figure 4: Plan and longitudinal views, showing higher-grade gold intersections (coloured dots), interpreted higher-grade trends and clusters ("jewellery boxes").

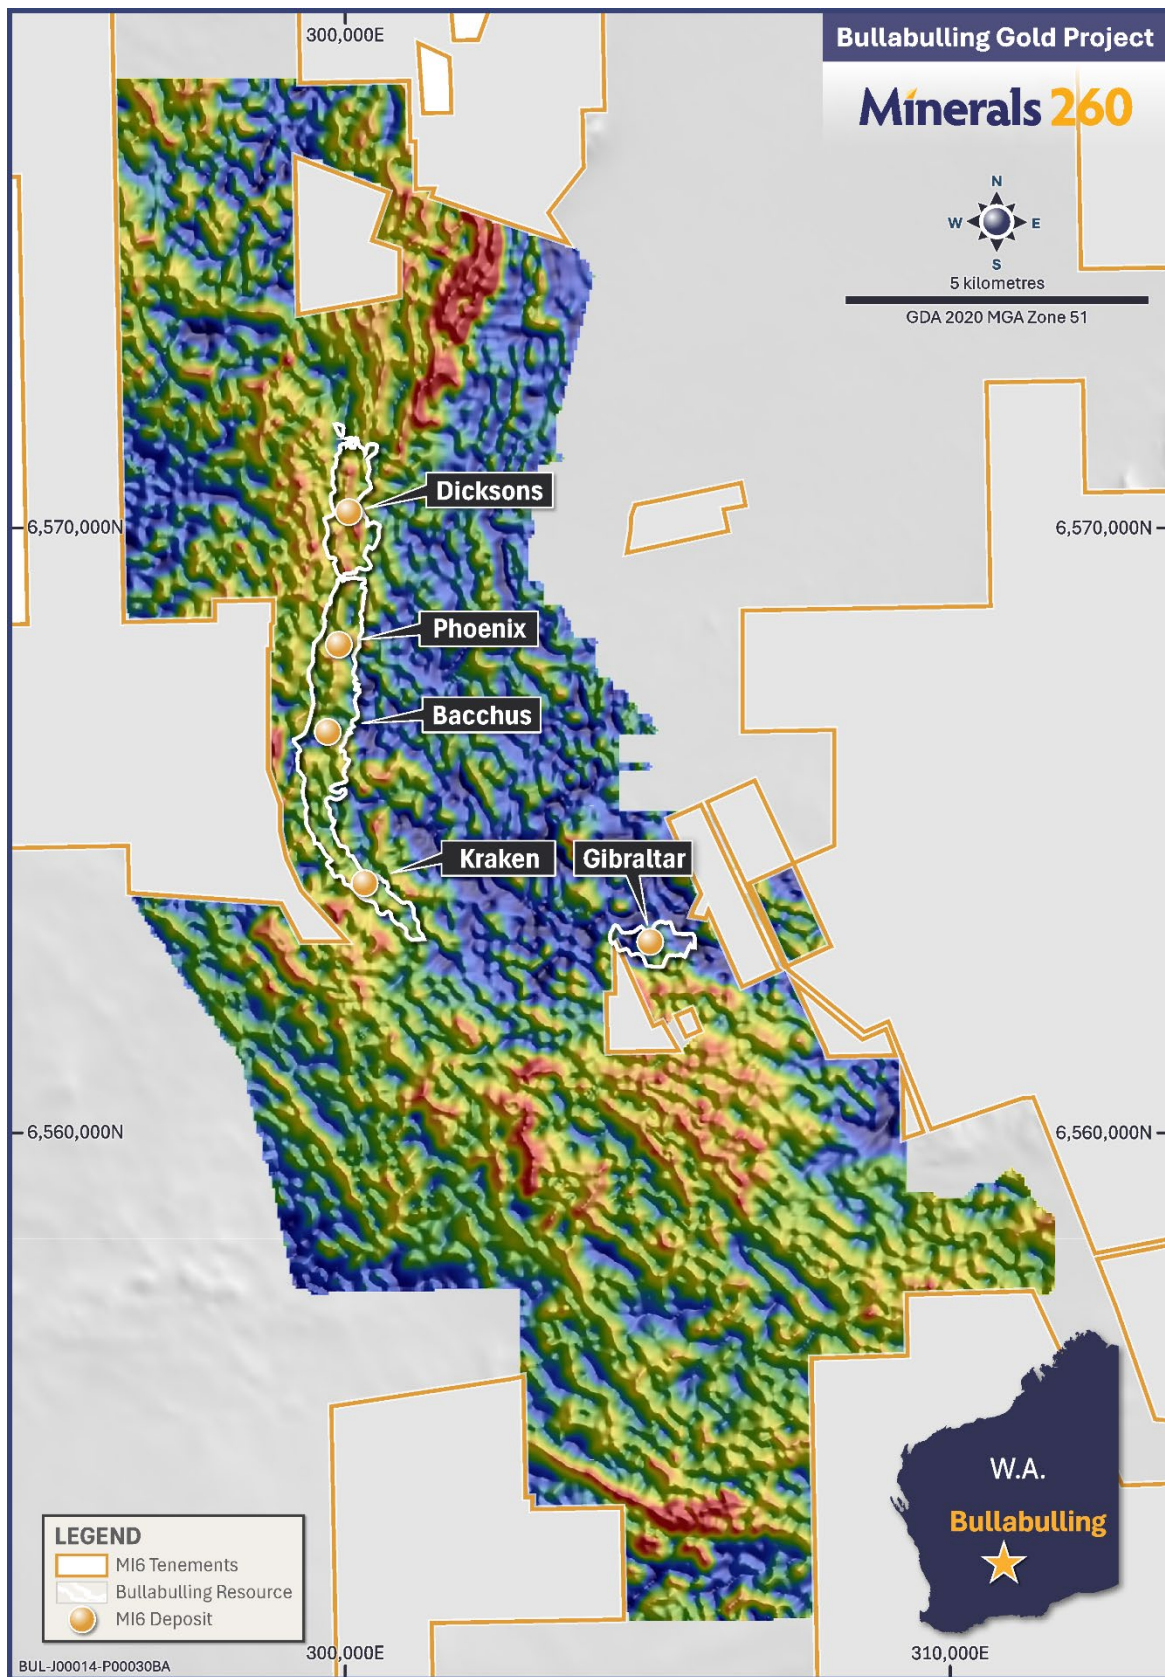


Figure 5: Regional ground gravity survey with MRE footprint (red – gravity high, blue – gravity low)

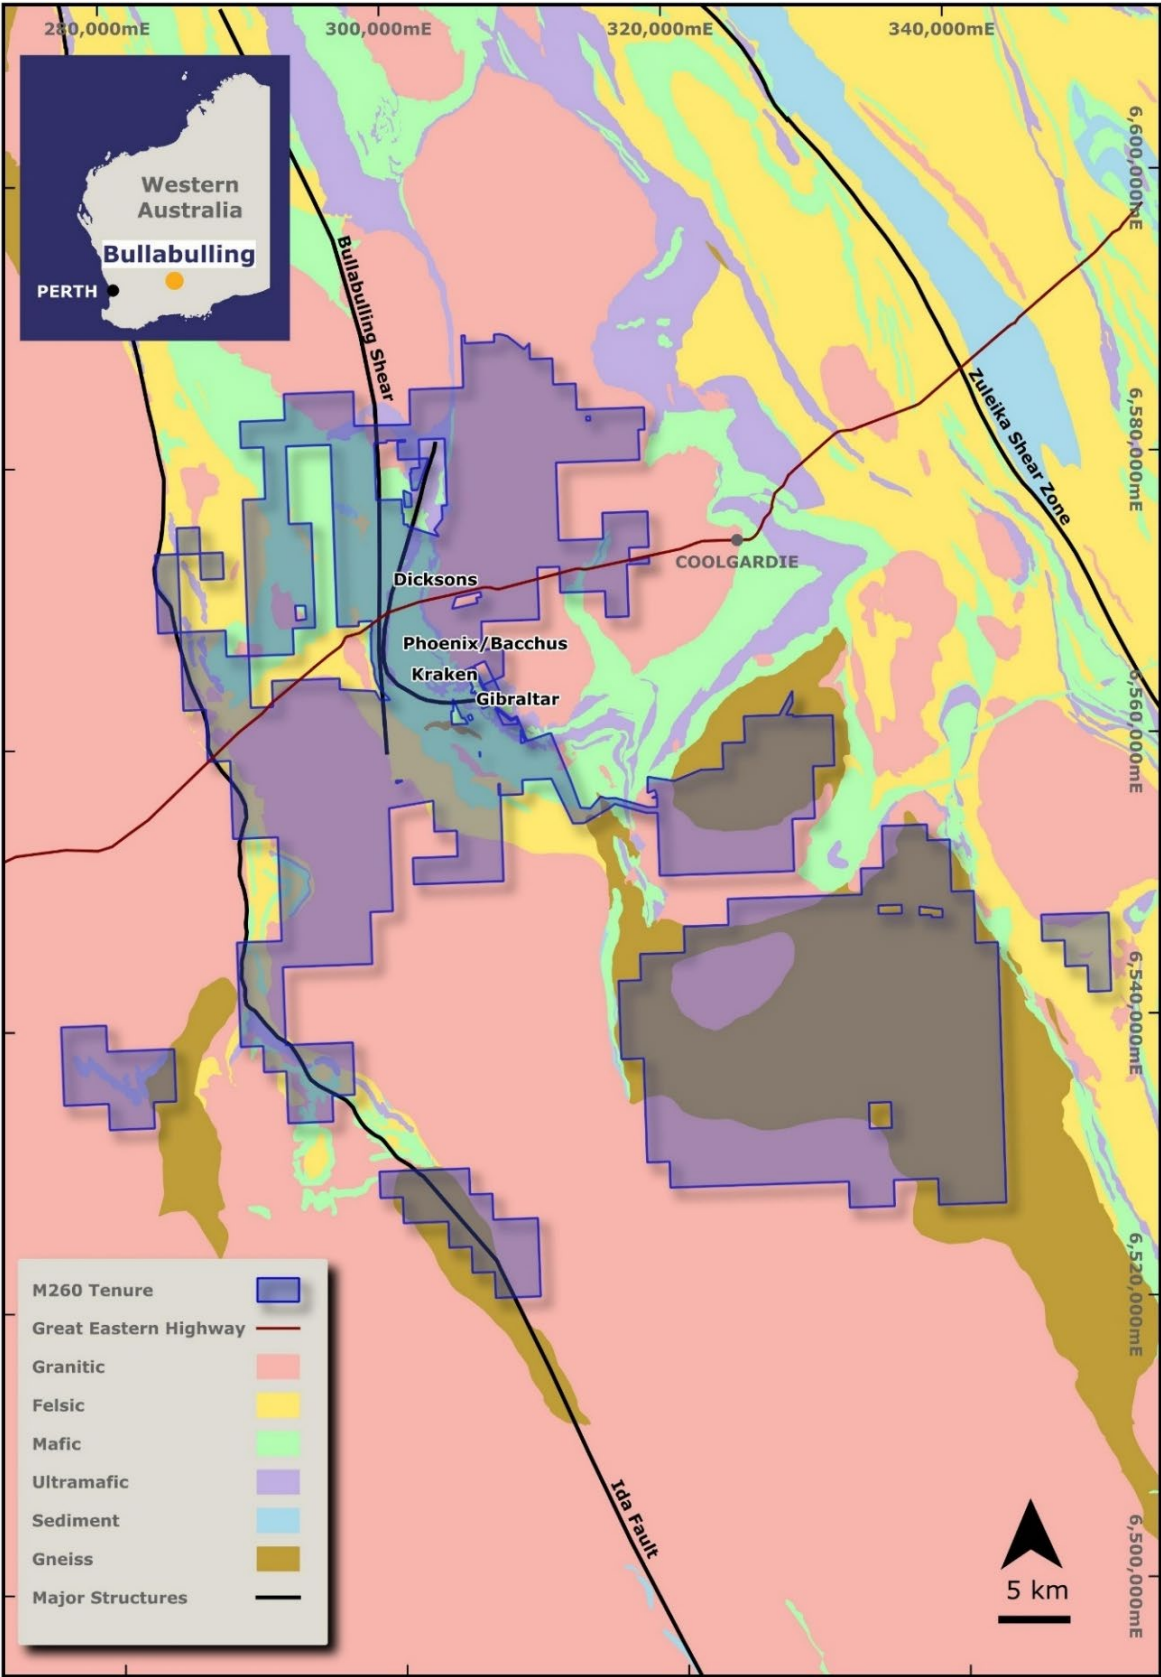


Figure 6: Bullabulling Gold Project tenements and geology

Authorisation

This announcement has been authorised for release by the Board of Minerals 260 Limited.

For further information please contact:

Investors

Joshua Hain
General Manager Investor Relations
T: +61 8 6556 6020
jhain@minerals260.com.au

Media

Nicholas Read
Read Corporate
T: +61 8 9388 1474
nicholas@readcorporate.com.au

Bullabulling Gold Project

Bullabulling Gold Project is a potential open pit mining operation located 25km south-west of Coolgardie in the Eastern Goldfields region of Western Australia. The Project hosts a JORC 2012 Mineral Resource Estimate of 190Mt @ 1.0g/t Au for 6.2Moz of gold (**Table 1**), on granted mining leases and is located within a ~1,542km² tenement package (**Figure 6**).

Table 1: Bullabulling MRE by Deposit

Deposit	Indicated			Inferred			Total Resource		
	Tonnes (Mt)	Grade Au (g/t)	Metal Au (koz)	Tonnes (Mt)	Grade Au (g/t)	Metal Au (koz)	Tonnes (Mt)	Grade Au (g/t)	Metal Au (koz)
Dicksons	17	0.93	500	5.5	0.94	170	22	0.93	660
Phoenix	62	0.94	1,900	12	1.0	390	74	0.95	2,300
Bacchus	55	1.0	1,800	17	1.1	580	72	1.0	2,400
Kraken	4.8	1.1	170	11	1.1	370	16	1.1	540
Gibraltar	2.3	1.0	77	6.2	1.1	220	8.5	1.1	290
Total	140	0.98	4,400	51	1.0	1,700	190	1.0	6,200

Notes for Table 1:

1. Mineral Resources reported above a cut-off grade of 0.35 g/t Au inside a A\$5,250 pit shell.
2. Numerical differences occur due to rounding to two significant figures to reflect the relative uncertainty of a mineral resource estimate.
3. Effective reporting date 8th July 2026.
4. Mineral Resources reported include the Project's maiden Ore Reserves.

Competent Persons' Statements

The information in this announcement that relates to exploration results is based on, and fairly represents, information and data compiled by Mr Matthew Blake, who is a Competent Person and a member of the Australasian Institute of Geoscientists (AIG). Mr Blake is a full-time employee of Minerals 260, is entitled to participate in the Company's Employee Securities Incentive Plan, and he and his associates hold securities in Minerals 260. Mr Blake has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration, and to the activities being undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Blake consents to the inclusion in this announcement of the information and data relating to the Bullabulling Gold Project based on his information in the form and context in which it appears.

The information in this announcement that relates to prior exploration results for the Bullabulling Gold Project is extracted from the following ASX announcement:

- "Bullabulling Gold Project Exploration Strategy" dated 12 May 2025
- "Bullabulling Gold Project Drilling Results" dated 4 June 2025
- "Bullabulling Gold Project Drilling Update" dated 7 July 2025
- "Gold discovered along strike and at depth at Bullabulling" dated 4 August 2025
- "High-Grade Intercepts Expand Bullabulling Drill Program" dated 9 September 2025
- "High-Grade Results to Support Bullabulling Resource Upgrade" dated 7 October 2025
- "Bullabulling Gold Project Mineral Resource Doubles to 4.5Moz" dated 1 December 2025
- "High-Grade Gold Continues to be Intersected at Bullabulling" dated 15 December 2025
- "Strong Results and Drilling Recommences at Bullabulling" dated 16 February 2026
- "Strong Drilling Results, Maiden Reserve and MRE on Track" dated 30 March 2026
- "Drilling Supports Bullabulling Resource Upgrade Potential" dated 4 May 2026.
- "Bullabulling Drilling Continues to Support Resource Growth" dated 9 June 2026
- "Bullabulling Drilling Extends Gold Mineralisation at Depth" dated 25 June 2026
- "Bullabulling Resource Increases to 6.2Moz" dated 8 July 2026
- "Next Phase of Exploration at Bullabulling Gold Project" dated 3 August 2026
- "Drilling at Bullabulling Continues to Deliver Strong Results" dated 20 August 2026.

This announcement is available at www.minerals260.com.au.

The Company confirms that it is not aware of any new information or data that materially affects the information included in the original announcements relating to the Bullabulling Gold Project. The Company confirms that the form and context in which the Competent Persons' findings presented have not been materially modified from the original market announcements.

July 2026 Mineral Resource Estimate

The information in this Report that relates to the July 2026 Mineral Resource Estimate for the Bullabulling Gold Project is extracted from the Minerals 260 Limited ASX announcement titled "Bullabulling Resource Increases to 6.2Moz" dated 8 July 2026. The announcement is available at www.minerals260.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcement and that all material assumptions and technical parameters underpinning the Mineral Resource Estimate in the previous announcement continue to apply and have not materially changed.

Forward Looking Statements

This announcement may contain forward-looking statements, guidance, forecasts, estimates, prospects, projections or statements in relation to future matters that may involve risks or uncertainties and may involve significant items of subjective judgement and assumptions of future events that may or may not eventuate (Forward Statements).

Forward Statements can generally be identified by the use of forward-looking words such as "anticipates", "estimates", "will", "should", "could", "going", "may", "expects", "plans", "forecast", "target" or similar expressions. Forward Statements including references to updating or upgrading mineral resource estimates, future or near-term production and the general prospectivity of the deposits at the Bullabulling Gold Project (Project), likelihood of permitting the Project and taking a financial investment decision, among other indications, guidance or outlook on future revenues, distributions or financial position and performance or return or growth in underlying investments are provided as a general guide only and should not be relied upon as an indication or guarantee of future performance.

In addition, these Forward Statements are based upon certain assumptions and other important factors that, if untrue, could materially affect the future results, performance or achievements expressed or implied by such information or statements. There can be no assurance that such information or statements will prove to be accurate.

Key assumptions upon which the Company's forward-looking information is based include, without limitation, assumptions regarding the exploration and development activities, receipt of timely approvals and permits, ability to obtain timely finance on reasonable terms when required in the future and contracting for development, construction and commissioning of any future mining operation on terms favourable to the Company, the current and future social, economic and political conditions and any other assumption generally associated with the mining industry. To the extent that certain statements contained in this announcement may constitute 'Forward Statements' or statements about forward looking matters, then the information reflects the Company's (and no other party's) intent, belief or expectations as at the date of this announcement. No independent third party has reviewed the reasonableness of any such statements or assumptions. None of the Company, its related bodies corporate and their respective officers, directors, employees, advisers, partners, affiliates and agents (together, the MI6 Parties) represent or warrant that such Forward Statements will be achieved or will prove to be correct or gives any warranty, express or implied, as to the accuracy, completeness, likelihood of achievement or reasonableness of any Forward Statement contained in this announcement.

Forward Statements are not guarantees of future performance and involve known and unknown risk, uncertainties and other factors, many of which are beyond the control of the Company, and their respective officers, employees, agents and advisors, that may cause actual results to differ materially from those expressed or implied in such statements. Except as required by law or regulation, the Company assumes no obligation to release updates or revisions to Forward Statements to reflect any changes. Recipients should form their own views as to these matters and any assumptions on which any of the Forward Statements are based and not place reliance on such statements.

Appendix 1 – RC Drill Hole Statistics

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
BBRD0009	RC/DD	299541	6567782	449	390.6	-60	90	354	362	8	1.00
								367	368	1	0.88
BBRD0306	RC/DD	299529	6566680	398	270	-80	90	235	237	2	0.57
								246	253	7	4.31
								inc. 0.8m @ 26.9 g/t Au from 247m			
BBRD0378	RC/DD	299368	6565933	434	336	-62	90	198.4	199.4	1.0	0.59
								204	205	1	2.69
								208.86	210	1.1	0.60
								245.6	246	0.4	11.00
								274	279	5	0.63
								309	313	4	0.50
BBRD0538	RC/DD	299493	6566330	364	300	-80	270	320.1	320.4	0.3	0.69
								170	171.1	1.1	290.00
								175.6	176.8	1.2	0.99
								179.5	180	0.5	0.76
								187.5	188	0.5	1.70
								197	198.1	1.1	0.84
								223.4	224	0.6	1.55
								226.8	227.3	0.44	1.35
								246.5	250	3.5	1.66
								264.5	265.2	0.7	1.39
BBRD0543	RC/DD	299530	6566340	366	246	-76	90	270	276.5	6.5	2.25
								291.7	295.5	3.9	1.03
								153	153.8	0.8	0.84
								170	178.5	8.5	1.11
BBRD0546	RC/DD	299305	6566382	440	408	-60	90	210.5	212	1.6	1.44
								221	224	3	0.97
								225	226	1	0.90
								240.1	241.0	0.9	1.11
								296	297	1	0.89
								299.7	301	1.3	0.53
								314	315	1	35.80
								324	328.0	4.0	0.62
BBRC0657	RC	300220	6568230	447	203	-60	90	331.8	334.2	2.4	1.89
								344.1	346.8	2.7	0.97
BBRD0669	RC/DD	299490	6566315	365	120	-60	270	357.1	358	0.9	1.31
								No significant results			
								141	142.5	1.4	2.08
								159.9	161	1.1	0.59
								172.7	176.3	3.6	0.74
								180.3	181	0.7	0.54
								184	185	1	1.23
								195	196	1	1.80
BBRC0689	RC	299776	6567680	438	214	-60	90	224	225	1	0.64
								228	228.8	0.8	0.58
								40	54	14	0.79
								98	99	1	0.52
								104	105	1	0.53
								109	123	14	1.16
								128	129	1	0.84
BBRD0693	RC/DD	299396	6567925	441	450	-60	90	147	149	2	1.01
								174	175	1	0.59
								379.7	380.9	1.2	0.94
								389.6	392	2.4	0.73
								395.5	395.9	0.4	8.04
								406	407	1	0.87
								412.0	417	5.0	2.76
BBRD0701	RC/DD	299199	6565990	455	460.2	-55	90	424	431	7	0.92
								434.1	435.7	1.6	0.95
								309	319	10	2.41
								328.3	329	0.7	1.74

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								337	338	1	1.34
								395.4	396.2	0.7	0.64
								399.1	400.0	0.9	1.17
								407	407.6	0.6	1.14
								412	413	1	7.55
								448.1	450	1.9	1.69
BBRD0702	RC/DD	299436	6568140	440	468.6	-60	90	Assays pending			
BBRC0711	RC	300050	6568080	447	102	-60	90	39	42	3	0.82
								55	61	6	0.75
								72	73	1	0.95
								78	83	5	0.71
								90	91	1	0.68
BBRC0712	RC	299897	6568030	443	174	-60	90	44	45	1	0.60
								50	59	9	1.60
								63	72	9	0.71
								102	103	1	0.62
								125	127	2	0.71
BBRC0717	RC	300383	6567192	436	318	-60	77	135	136	1	0.72
								No significant results			
BBRC0718	RC	299609	6565197	433	192	-60	90	83	89	6	0.66
								97	98	1	0.73
								135	142	7	1.45
BBRC0719	RC	299389	6566841	432	216	-60	90	157	162	5	2.78
BBRC0721	RC	299820	6564683	421	208	-60	90	34	36	2	0.62
								41	42	1	1.11
								46	48	2	1.33
								52	53	1	1.3
								59	66	7	0.95
								87	88	1	0.62
								122	123	1	1.67
								132	133	1	0.83
BBRC0722	RC	300150	6570505	439	214	-60	90	50	55	5	0.63
								59	60	1	0.6
								159	160	1	0.53
								167	168	1	0.8
BBRC0723	RC	301252	6563220	417	238	-60	45	32	36	4	0.95
BBRC0724	RC	301311	6563053	415	226	-60	45	No significant results			
BBRC0725	RC	301423	6562940	413	292	-60	45	No significant results			
BBRC0726	RC	301536	6562826	413	208	-60	45	Assays pending			
BBRC0727	RC	301663	6562700	412	172	-60	45	No significant results			
BBRC0728	RC	300871	6563408	416	196	-60	45	152	156	4	0.69
								124	128	4	0.79
BBRC0729	RC	301123	6563109	415	220	-60	45	164	168	4	1.05
								33	34	1	1.66
BBRC0732	RC	299783	6567574	436	221	-60	90	39	40	1	0.64
								44	51	7	0.89
								56	62	6	0.81
								74	76	2	1.26
								87	88	1	0.67
								95	96	1	0.96
								123	124	1	0.65
								128	129	1	0.56
BBRC0733	RC	299600	6567680	436	300	-60	90	142	156	14	1.00
								166	167	1	0.54
								177	185	8	0.51
								198	201	3	1.28
								206	211	5	3.78
								incl. 1m @ 12.8g/t Au from 209m			
								215	216	1	0.59
								220	224	4	0.91
								240	241	1	0.65
								249	250	1	0.72
								254	269	15	1.91

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								293	294	1	1.44
								298	300	2	1.36
BBRC0734	RC	299540	6565675	427	252	-60	90	48	50	2	1.30
								94	95	1	1.43
								100	105	5	3.13
								147	148	1	0.60
								180	181	1	1.40
								200	201	1	1.25
								206	207	1	2.40
								211	213	2	0.54
BBRC0735	RC	300100	6569940	447	312	-70	90	229	230	1	0.57
								19	24	5	1.83
								38	41	3	2.11
								96	99	3	0.63
								114	117	3	0.67
								137	138	1	1.59
								177	178	1	0.85
								200	201	1	1.36
BBRC0736	RC	300198	6569543	450	252	-60	90	281	282	1	7.04
								50	51	1	0.61
								77	78	1	0.54
BBRC0737	RC	300005	6571066	433	150	-78	105	83	90	7	1.24
								47	48	1	0.59
								82	83	1	1.77
								90	94	4	1.53
BBRC0738	RC	300183	6570340	438	60	-70	90	104	105	1	0.60
BBRC0739	RC	299939	6571540	432	162	-60	90	3	4	1	1.18
BBRC0740	RC	299520	6565179	432	252	-60	90	No significant results			
								152	153	1	2.67
								160	161	1	1.15
								166	170	4	0.53
BBRC0741	RC	300020	6571540	432	264	-60	90	173	174	1	0.92
BBRC0742	RC	300101	6571540	432	216	-60	90	200	204	4	0.54
BBRC0743	RC	300265	6571940	431	156	-60	90	No significant results			
BBRC0744	RC	300020	6571940	429	312	-60	90	Assays pending			
BBRC0745	RC	299859	6571940	429	216	-60	90	Assays pending			
BBRC0746	RC	300255	6571540	433	204	-60	90	120	124	4	1.11
BBRC0747	RC	299859	6571540	432	330	-60	90	308	312	4	0.6
BBRC0748	RC	301059	6563705	419	96	-60	45	No significant results			
BBRC0749	RC	301196	6563390	420	84	-60	45	40	44	4	0.83
								56	60	4	1.01
BBRC0750	RC	300967	6563278	416	210	-60	45	160	164	4	0.5
BBRC0751	RC	300101	6571930	430	288	-60	90	96	100	4	1.52
								216	220	4	0.55
								224	232	8	0.87
								284	288	4	2.32
BBRC0752	RC	301514	6562632	411	204	-60	45	No significant results			
BBRC0753	RC	301644	6562489	411	168	-60	45	No significant results			
BBRC0754	RC	301773	6562605	412	138	-60	45	92	96	4	0.63
BBRC0755	RC	300422	6563973	416	222	-60	45	Assays pending			
BBRC0756	RC	300061	6563846	416	138	-60	45	Assays pending			
BBRC0757	RC	303628	6563275	431	210	-60	0	Assays pending			
BBRC0758	RC	303642	6563152	428	153	-60	0	Assays pending			
BBRC0759	RC	303640	6563515	429	180	-60	0	Assays pending			
BBRC0760	RC	301363	6563106	414	162	-60	45	Assays pending			
BBRC0761	RC	301190	6562826	411	314	-60	45	Assays pending			
BBRC0762	RC	303350	6562309	423	226	-60	0	Assays pending			
BBRC0763	RC	303350	6562129	419	245	-60	0	Assays pending			
BBRC0764	RC	303350	6561968	418	166	-60	0	Assays pending			
BBRC0765	RC	303622	6562301	423	226	-60	0	Assays pending			
BBRC0766	RC	303632	6562136	419	202	-60	0	Assays pending			
BBRC0767	RC	303630	6561976	415	236	-60	0	Assays pending			

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
BBRC0770	RC	303942	6562308	419	243	-60	0			Assays pending	
BBRC0771	RC	303949	6562139	415	164	-60	0			Assays pending	
BBRC0772	RC	303961	6561988	414	281	-60	0			Assays pending	
BBRC0773	RC	304198	6562167	414	156	-60	0			Assays pending	
BBRC0774	RC	304203	6562090	413	150	-60	0			Assays pending	
BBRC0775	RC	304218	6562002	412	240	-60	0			Assays pending	
BBRC0776	RC	304208	6562247	416	162	-60	0			Assays pending	
BBRC0777	RC	304243	6562252	414	156	-60	0			Assays pending	
BBRC0778	RC	304261	6562192	413	144	-60	0			Assays pending	
BBRC0779	RC	304254	6562088	413	144	-60	0			Assays pending	
BBRC0780	RC	304275	6562007	412	174	-60	0			Assays pending	
BBRC0781	RC	304110	6562249	417	43	-60	0			Assays pending	
BBRC0782	RC	304112	6562165	415	150	-60	0			Assays pending	
BBDD0075	DD	300965	6567339	443	351	-60	77			No significant results	
BBDD0076	DD	299731	6567830	440	10.7	-55	90			Assays Pending	
BBGT009	DD	300245	6567925	442	150.5	-55	224.3			No significant results	
STDD001	DD	300150	6567530	438	51	-60	90			No significant results	
STDD002	DD	300100	6567530	440	70.5	-60	90	34.5	36.1	1.6	0.76
								52.5	58.5	6	0.81
STDD003	DD	300060	6567530	440	96	-60	90	24	25	1	1.33
								30.4	30.9	0.5	0.54
								33	34.8	1.8	0.51
								41.1	42	0.9	1.32
								53.8	59.5	5.7	0.74
								75	76.18	1.18	2.12
STDD004	DD	300020	6567530	439	110	-60	90	38	39	1	0.60
								53.45	55.46	2.01	1.14
								59.15	59.55	0.4	0.86
								68	69.3	1.3	0.51
								71.25	71.5	0.25	0.58
								72.63	73.95	1.32	0.73
								80.46	81	0.54	0.55
								89.56	95.5	5.94	0.71
STDD005	DD	299980	6567530	437	126	-60	90	0	0.2	0.2	1.45
								15	16	1	1.15
								31	33.9	2.9	0.76
								42.0	42.4	0.4	0.62
								48.2	49.0	0.9	0.99
								70.2	70.5	0.3	0.90
								74.1	89.3	15.2	1.47
								incl. 0.5m @ 10.2 g/t Au from 85.7m			
								incl. 0.2m @ 18.1 g/t Au from 88.2m			
								94.8	95.2	0.4	0.86
								107.4	110.6	3.2	1.34
STDD006	DD	299940	6567530	436	140	-60	90			Assays Pending	
STDD007	DD	299900	6567530	436	160.4	-60	90	37.4	38	0.6	1.87
								55.8	62.2	6.4	0.58
								70.5	77.0	6.5	1.16
								87.1	87.6	0.5	1.09
								95.6	95.9	0.2	0.88
								109.6	110.0	0.4	11.30
								incl. 0.4m @ 11.3 g/t Au from 109.6m			
								120.4	123.1	2.6	0.66
								127.3	127.5	0.3	0.58
								132	132.3	0.3	0.54
								133.3	133.5	0.2	0.50
								141.9	144.5	2.6	3.70
								incl. 0.3m @ 16.5 g/t Au from 141.9m			
STDD008	DD	299860	6567530	437	185	-60	90			Assays Pending	
STDD009	DD	299820	6567530	436	205	-60	90			Assays Pending	
STDD010	DD	299780	6567530	435	230	-60	90	36.8	43.2	6.4	0.55
								46.5	47.1	0.6	0.52
								53.4	53.6	0.25	0.55

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								55.3	64.0	8.7	0.51
								64.7	65.5	0.8	0.61
								69.7	70.2	0.5	0.57
								105.5	108.5	3.0	0.63
STDD011	DD	299757	6567530	435	245	-60	90	Assays Pending			
STDD012	DD	299720	6567530	434	254.7	-60	90	Assays Pending			
STDD013	DD	299683	6567530	434	271.2	-60	90	Assays Pending			
STDD015	DD	299580	6567530	434	310.4	-60	90	Assays Pending			

Appendix 2 – Grade Control Drill Hole Statistics

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
BBGC0001	RC	299821	6567480	435	90	-60	88	1	2	1	0.67
								41	43	2	0.78
								61	65	4	0.83
								76	77	1	0.50
								78	79	1	0.50
BBGC0002	RC	299830	6567480	436	90	-60	93	0	1	1	0.64
								43	48	5	2.03
								74	75	1	1.00
BBGC0003	RC	299841	6567480	435	90	-60	93	36	40	4	1.47
								44	53	9	4.51
								inc. 1m @ 30.8g/t Au from 48m			
								61	62	1	0.57
								64	73	9	0.51
								87	88	1	0.67
BBGC0004	RC	299851	6567480	435	90	-59	89	0	2	2	0.83
								43	46	3	0.60
								58	64	6	0.69
								86	87	1	0.55
								89	90	1	0.74
BBGC0005	RC	299858	6567480	435	90	-60	89	32	33	1	0.51
								52	53	1	0.54
								55	62	7	0.51
								73	74	1	1.82
								81	82	1	0.84
								85	86	1	0.65
BBGC0006	RC	299871	6567480	434	90	-60	86	26	31	5	0.83
								36	41	5	1.05
								74	78	4	0.56
BBGC0007	RC	299880	6567480	435	90	-60	89	0	2	2	0.88
								22	34	12	0.87
								42	45	3	0.66
								57	58	1	0.72
								70	74	4	0.58
								86	88	2	0.87
BBGC0008	RC	299889	6567480	435	180	-60	87	95	97	2	0.59
								131	142	11	0.99
								146	151	5	1.09
								156	157	1	0.72
BBGC0009	RC	299901	6567480	435	90	-60	88	18	19	1	0.52
								23	39	16	0.67
								45	46	1	0.64
								54	55	1	0.58
								65	69	4	0.91
								17	21	4	1.24
BBGC0010	RC	299911	6567480	435	85	-60	93	29	33	4	1.85
								37	38	1	0.52
								49	50	1	0.50
								56	63	7	0.83
								78	79	1	0.93

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
BBGC0011	RC	299921	6567480	435	75	-60	90	21	27	6	0.76
								35	39	4	0.56
								51	62	11	0.54
BBGC0012	RC	299930	6567480	435	70	-60	89	21	28	7	1.27
								32	33	1	0.73
								38	57	19	0.62
								68	70	2	0.95
BBGC0013	RC	299940	6567480	436	65	-61	89	26	27	1	0.83
								31	51	20	0.55
BBGC0014	RC	299950	6567480	436	65	-60	89	18	19	1	1.30
								32	53	21	0.75
BBGC0015	RC	299960	6567480	436	65	-60	90	18	20	2	0.85
								28	37	9	0.97
								42	51	9	0.73
								57	58	1	0.76
BBGC0016	RC	299970	6567480	436	55	-60	89	20	21	1	2.60
								25	49	24	0.68
BBGC0017	RC	299979	6567480	436	50	-60	88	18	19	1	0.56
								24	47	23	0.90
BBGC0018	RC	299990	6567481	437	45	-60	88	32	45	13	0.76
BBGC0019	RC	299800	6567489	435	90	-60	91	0	1	1	0.60
								41	51	10	0.70
								68	69	1	0.65
BBGC0020	RC	299811	6567490	435	90	-60	89	0	1	1	1.03
								59	60	1	0.69
								80	81	1	0.95
BBGC0021	RC	299821	6567490	436	90	-60	88	50	56	6	1.27
								63	64	1	3.28
								73	74	1	1.70
BBGC0022	RC	299831	6567490	436	90	-60	89	38	44	6	0.60
								47	48	1	0.67
								59	64	5	0.90
								89	90	1	0.55
BBGC0023	RC	299841	6567490	435	90	-60	91	32	34	2	0.86
								37	45	8	0.52
								47	48	1	0.75
								68	69	1	0.59
BBGC0024	RC	299851	6567490	435	90	-60	91	86	87	1	0.56
								38	48	10	0.75
								55	60	5	0.56
								74	75	1	0.58
BBGC0025	RC	299861	6567490	435	90	-60	90	85	88	3	0.62
								26	45	19	0.72
								56	57	1	1.69
								70	71	1	0.51
								77	78	1	0.82
BBGC0026	RC	299871	6567490	435	90	-60	90	81	84	3	0.60
								0	3	3	1.47
								27	48	21	3.44
								inc. 1m @ 52.6g/t Au from 36m			
								57	58	1	1.08
								65	67	2	0.91
								72	77	5	0.71
BBGC0027	RC	299881	6567490	435	90	-60	90	87	88	1	0.61
								23	38	15	1.01
								52	53	1	1.43
								67	72	5	1.39
BBGC0028	RC	299891	6567490	435	90	-60	90	85	89	4	1.09
								0	2	2	1.09
								31	37	6	0.60
								61	66	5	0.51
								79	87	8	2.20
BBGC0029	RC	299901	6567490	435	85	-61	90	inc. 1m @ 11.8g/t Au from 85m			
								18	19	1	1.83

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								30	35	5	0.68
								50	51	1	0.62
								56	58	2	0.67
								62	63	1	0.59
								74	75	1	2.08
BBGC0030	RC	299911	6567490	435	80	-60	91	23	29	6	0.90
								38	39	1	0.91
								52	53	1	0.51
								58	59	1	0.78
								74	75	1	0.50
BBGC0031	RC	299921	6567490	435	75	-60	89	19	20	1	1.10
								24	29	5	0.94
								37	38	1	0.55
								48	57	9	0.92
								69	70	1	0.50
BBGC0032	RC	299931	6567490	436	70	-60	90	15	18	3	1.19
								25	33	8	0.62
								40	56	16	0.76
								63	64	1	0.89
								68	70	2	0.60
BBGC0033	RC	299941	6567490	436	70	-60	91	21	52	31	0.78
								64	65	1	0.55
BBGC0034	RC	299951	6567490	436	66	-60	90	17	19	2	0.95
								30	38	8	0.88
								43	46	3	1.30
BBGC0035	RC	299961	6567490	436	60	-60	89	17	18	1	1.35
								27	28	1	1.05
								32	44	12	1.07
								49	50	1	0.56
								52	53	1	0.61
BBGC0036	RC	299971	6567490	436	55	-60	91	14	15	1	0.68
								32	37	5	0.72
								48	49	1	2.64
BBGC0037	RC	299801	6567500	435	90	-60	91	45	46	1	0.51
								51	53	2	0.53
								77	78	1	9.83
								82	83	1	0.58
								87	88	1	0.76
BBGC0038	RC	299811	6567500	435	90	-61	92	71	74	3	0.58
BBGC0039	RC	299821	6567500	436	90	-61	90	0	1	1	0.60
								38	39	1	0.70
								47	53	6	0.65
								65	66	1	0.72
								82	85	3	1.41
BBGC0040	RC	299830	6567500	436	90	-61	91	0	1	1	0.56
								41	43	2	0.59
								48	59	11	0.66
								82	84	2	0.55
BBGC0041	RC	299841	6567500	436	90	-60	90	40	41	1	0.81
								67	70	3	0.61
								86	89	3	0.50
BBGC0042	RC	299850	6567500	436	90	-60	89	31	44	13	0.66
								56	57	1	0.52
								78	83	5	0.67
BBGC0043	RC	299861	6567500	435	90	-60	89	18	19	1	0.52
								26	38	12	0.73
								47	51	4	1.74
								77	78	1	0.52
BBGC0044	RC	299871	6567500	435	90	-60	88	27	28	1	1.83
								36	42	6	1.92
								68	69	1	0.65
								73	76	3	1.10
								83	90	7	1.73
BBGC0045	RC	299881	6567501	435	90	-60	86	26	27	1	0.64

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								45	47	2	0.56
								65	71	6	0.55
								82	85	3	1.04
BBGC0046	RC	299891	6567500	435	90	-61	91	2	3	1	0.67
								25	26	1	0.66
								37	38	1	0.86
								54	55	1	0.69
								59	63	4	0.84
								74	75	1	0.61
BBGC0047	RC	299901	6567500	436	85	-60	89	79	88	9	0.90
								0	1	1	0.61
								9	10	1	0.62
								27	38	11	0.59
								54	55	1	0.68
								77	83	6	0.74
BBGC0048	RC	299911	6567500	436	80	-60	90	0	3	3	0.84
								26	27	1	0.58
								29	30	1	0.64
								41	42	1	1.91
								50	51	1	0.50
								56	62	6	1.90
BBGC0049	RC	299921	6567500	436	75	-61	88	70	71	1	0.80
								0	2	2	0.61
								29	30	1	6.55
								36	42	6	0.88
								46	47	1	2.67
								52	53	1	0.97
BBGC0050	RC	299931	6567500	436	70	-61	89	12	14	2	2.40
								19	21	2	0.68
								25	27	2	1.92
								31	49	18	0.61
								63	68	5	0.72
								31	48	17	0.66
BBGC0051	RC	299941	6567500	436	66	-60	90	61	64	3	0.66
								35	48	13	0.91
BBGC0052	RC	299951	6567500	436	60	-60	90	58	60	2	0.76
								9	10	1	0.63
BBGC0053	RC	299961	6567500	437	55	-60	87	12	13	1	0.75
								34	40	6	1.10
								52	53	1	0.54
								31	40	9	0.86
BBGC0054	RC	299971	6567500	437	55	-60	91	10	12	2	1.29
BBGC0055	RC	299981	6567500	437	50	-60	90	27	42	15	0.60
BBGC0056	RC	299991	6567500	437	45	-59	91	27	32	5	0.71
								40	41	1	0.90
BBGC0057	RC	299801	6567510	435	90	-61	92	44	52	8	0.63
BBGC0058	RC	299811	6567510	435	90	-60	89	39	51	12	0.58
								63	67	4	0.66
								84	85	1	2.05
BBGC0059	RC	299819	6567510	436	90	-60	89	57	61	4	1.10
								82	83	1	1.50
BBGC0060	RC	299831	6567510	436	90	-60	92	0	1	1	1.10
								32	33	1	0.83
								48	49	1	0.56
								51	52	1	0.56
								71	73	2	0.80
								82	83	1	0.64
BBGC0061	RC	299841	6567510	436	90	-60	92	1	2	1	0.52
								38	46	8	0.59
								63	64	1	1.08
								78	79	1	0.83
BBGC0062	RC	299851	6567510	436	90	-61	91	39	41	2	0.56
								47	48	1	0.54
								51	54	3	0.65

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								62	63	1	0.56
								65	66	1	0.51
								77	81	4	0.51
								84	85	1	0.75
								89	90	1	5.78
BBGC0063	RC	299860	6567510	436	90	-61	92	33	38	5	0.56
								66	77	11	0.58
								81	82	1	1.80
								86	87	1	1.52
BBGC0064	RC	299871	6567510	436	90	-60	88	0	1	1	0.53
								29	30	1	1.01
								35	36	1	0.53
								39	40	1	1.19
								70	71	1	0.66
								86	90	4	3.04
BBGC0065	RC	299891	6567510	436	90	-60	89	0	2	2	0.63
								6	7	1	0.68
								31	33	2	1.21
								50	51	1	0.56
								60	65	5	0.54
								67	70	3	0.64
								76	80	4	1.66
BBGC0066	RC	299901	6567510	436	90	-60	87	0	1	1	0.84
								7	8	1	0.64
								28	29	1	2.02
								34	36	2	1.32
								54	58	4	0.99
								66	67	1	0.75
								71	72	1	0.64
								76	82	6	0.91
BBGC0067	RC	299911	6567510	436	80	-60	89	0	2	2	0.83
								26	27	1	1.30
								32	35	3	0.51
								50	51	1	0.91
								56	57	1	1.39
								73	76	3	0.75
BBGC0068	RC	299921	6567510	436	75	-61	89	22	34	12	0.84
								39	47	8	0.52
								51	53	2	0.82
								56	57	1	0.86
								67	68	1	0.65
BBGC0069	RC	299931	6567510	436	70	-60	90	30	31	1	0.54
								32	33	1	0.59
								39	49	10	0.69
								60	61	1	0.54
								62	65	3	0.55
								67	68	1	0.61
BBGC0070	RC	299941	6567510	436	65	-60	89	7	14	7	10.90
								inc. 2m @ 35.4g/t Au from 7m			
								23	24	1	0.88
								29	30	1	0.63
								37	49	12	0.67
								58	64	6	0.53
BBGC0071	RC	299951	6567510	437	60	-60	89	36	42	6	0.57
								57	58	1	0.83
BBGC0072	RC	299961	6567510	437	55	-60	89	16	17	1	0.97
								32	38	6	1.21
								52	54	2	0.71
BBGC0073	RC	299971	6567510	437	51	-60	89	29	37	8	1.01
								49	50	1	0.52
BBGC0074	RC	299981	6567510	437	50	-60	90	25	35	10	0.95
								39	40	1	0.60
								43	44	1	0.90
BBGC0075	RC	299990	6567510	437	45	-61	89	21	31	10	0.89

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								36	37	1	0.57
								38	40	2	0.51
BBGC0076	RC	299791	6567520	435	90	-60	92	36	37	1	0.61
								43	44	1	0.55
								50	59	9	1.12
BBGC0077	RC	299801	6567520	435	90	-60	89	43	53	10	0.64
								58	60	2	1.08
BBGC0078	RC	299811	6567520	435	90	-60	89	41	48	7	0.60
								77	79	2	1.24
								88	89	1	0.97
BBGC0079	RC	299820	6567520	436	90	-60	90	37	38	1	0.83
								43	48	5	1.29
								52	53	1	0.55
								76	84	8	1.04
BBGC0080	RC	299830	6567520	436	90	-61	90	44	48	4	0.58
								67	70	3	2.56
BBGC0081	RC	299841	6567520	437	90	-60	91	0	2	2	0.85
								36	37	1	0.53
								58	60	2	1.03
								81	82	1	0.77
								89	90	1	0.50
BBGC0082	RC	299851	6567520	437	90	-60	91	1	2	1	0.51
								30	40	10	3.98
								inc. 1m @ 29.1g/t Au from 31m			
								46	52	6	0.50
								55	56	1	0.60
								57	58	1	0.52
								74	82	8	0.77
								31	32	1	0.57
BBGC0083	RC	299860	6567520	437	90	-60	89	36	37	1	0.60
								40	51	11	0.52
								69	71	2	0.73
								82	90	8	1.62
								36	41	5	1.04
BBGC0084	RC	299871	6567520	436	90	-60	89	46	47	1	0.81
								66	67	1	1.28
								80	88	8	4.73
								inc. 1m @ 22.3g/t Au from 85m			
BBGC0085	RC	299881	6567520	436	90	-60	87	13	14	1	1.49
								29	39	10	0.68
								44	47	3	0.76
								64	65	1	0.55
								79	86	7	1.20
BBGC0086	RC	299891	6567520	436	90	-59	90	22	25	3	0.85
								33	34	1	0.65
								41	42	1	0.65
								60	61	1	0.61
								63	65	2	0.60
								74	82	8	1.34
BBGC0087	RC	299901	6567520	436	90	-61	89	36	39	3	0.55
								53	54	1	0.65
								56	57	1	1.02
								61	64	3	0.82
								69	77	8	1.20
BBGC0088	RC	299911	6567520	436	80	-61	89	31	37	6	0.96
								45	46	1	0.63
								52	57	5	0.54
								66	73	7	0.66
BBGC0089	RC	299921	6567520	436	90	-60	87	21	37	16	0.68
								42	48	6	0.53
								57	58	1	0.73
								62	63	1	0.72
								66	67	1	0.51
BBGC0090	RC	299931	6567520	436	70	-60	89	22	24	2	1.40

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								28	29	1	1.29
								43	52	9	0.53
								59	64	5	1.02
BBGC0091	RC	299941	6567520	436	65	-61	89	0	1	1	0.62
								16	29	13	0.96
								38	41	3	1.04
								46	49	3	0.63
								54	62	8	0.61
BBGC0092	RC	299951	6567520	437	60	-60	89	36	45	9	0.74
								52	57	5	0.68
BBGC0093	RC	299961	6567520	437	55	-61	90	32	33	1	0.79
								48	54	6	0.54
BBGC0094	RC	299971	6567520	437	55	-59	88	30	35	5	0.67
								43	48	5	1.02
BBGC0095	RC	299981	6567520	437	50	-60	88	21	28	7	0.65
								34	35	1	0.54
								42	44	2	0.75
BBGC0096	RC	299990	6567520	437	45	-59	89	34	36	2	0.52
BBGC0097	RC	299781	6567530	435	90	-60	91	39	42	3	0.93
								53	55	2	0.74
								59	60	1	0.94
BBGC0098	RC	299790	6567530	435	90	-61	91	36	37	1	1.29
								43	44	1	0.57
								51	53	2	0.90
BBGC0099	RC	299800	6567530	435	90	-61	89	36	37	1	0.52
								43	52	9	0.60
								81	82	1	0.56
								88	90	2	0.96
BBGC0100	RC	299810	6567530	435	90	-61	90	35	45	10	0.58
								50	53	3	1.24
								69	70	1	0.53
								77	85	8	0.73
BBGC0101	RC	299821	6567531	436	90	-61	88	36	37	1	1.33
								45	47	2	0.63
								56	60	4	0.81
								73	75	2	1.41
								87	88	1	2.77
BBGC0102	RC	299830	6567531	436	90	-61	90	32	33	1	0.60
								51	53	2	0.58
								58	65	7	0.91
								80	83	3	1.16
BBGC0103	RC	299840	6567530	437	90	-61	90	0	1	1	0.50
								50	51	1	0.60
								75	78	3	0.89
BBGC0104	RC	299850	6567530	437	90	-61	90	38	39	1	0.63
								44	52	8	0.56
								66	74	8	0.60
								84	90	6	0.53
BBGC0105	RC	299860	6567530	437	90	-60	91	24	25	1	1.17
								67	74	7	0.82
								80	90	10	1.31
BBGC0106	RC	299871	6567530	437	90	-60	89	21	22	1	1.01
								34	36	2	0.79
								44	45	1	0.73
								56	57	1	0.83
								64	69	5	0.70
BBGC0107	RC	299881	6567530	437	90	-60	90	80	85	5	1.14
								24	27	3	0.83
								31	32	1	1.35
								58	64	6	0.65
BBGC0108	RC	299890	6567530	437	85	-60	91	74	83	9	1.19
								14	15	1	0.70
								19	20	1	1.30
								24	25	1	0.52

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								28	29	1	1.03
								33	34	1	0.51
								35	36	1	0.62
								44	45	1	0.50
								50	51	1	0.51
								56	57	1	0.52
								58	59	1	0.64
								61	62	1	0.74
								77	82	5	2.00
BBGC0109	RC	299901	6567530	437	85	-60	90	1	2	1	0.57
								31	32	1	1.42
								37	40	3	0.61
								54	58	4	0.74
								62	64	2	0.95
								70	77	7	1.97
BBGC0110	RC	299910	6567530	437	40	-61	91	No significant results			
BBGC0111	RC	299921	6567530	436	75	-60	91	1	2	1	0.57
								48	51	3	0.51
								60	67	7	0.65
BBGC0112	RC	299931	6567530	436	70	-60	90	25	27	2	1.05
								41	42	1	0.54
								46	50	4	0.69
								55	62	7	0.73
								66	67	1	1.93
BBGC0113	RC	299940	6567530	436	65	-60	89	37	41	4	0.88
								46	58	12	0.54
BBGC0114	RC	299951	6567530	437	60	-60	89	34	38	4	0.84
								46	47	1	0.54
								53	54	1	0.58
BBGC0115	RC	299960	6567530	437	55	-60	89	28	34	6	0.71
								43	50	7	0.76
BBGC0116	RC	299970	6567530	438	55	-60	90	34	45	11	0.65
BBGC0117	RC	299790	6567540	435	90	-60	89	42	53	11	0.95
								58	59	1	1.49
BBGC0118	RC	299800	6567540	435	90	-60	89	34	46	12	0.65
								76	79	3	0.80
								83	84	1	0.79
								88	89	1	0.72
BBGC0119	RC	299810	6567540	435	90	-60	90	34	43	9	0.65
								66	68	2	0.75
								77	79	2	1.08
								84	85	1	1.55
BBGC0120	RC	299821	6567540	436	90	-60	89	33	38	5	0.60
								42	46	4	0.76
								65	67	2	1.00
								78	79	1	3.00
								86	87	1	0.63
BBGC0121	RC	299830	6567540	436	90	-60	90	34	47	13	1.28
								67	69	2	0.51
								78	82	4	1.05
BBGC0122	RC	299840	6567540	437	90	-60	89	40	49	9	0.53
								60	62	2	0.73
								74	75	1	0.72
								82	83	1	0.51
								89	90	1	0.52
BBGC0123	RC	299850	6567540	437	90	-61	90	43	44	1	0.56
								49	60	11	9.01
								inc. 2m @ 44.8g/t Au from 49m			
								70	72	2	1.32
								83	84	1	0.95
								88	90	2	0.78
BBGC0124	RC	299860	6567540	437	90	-60	89	23	24	1	0.52
								36	40	4	0.95
								44	45	1	0.52

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								48	49	1	0.95
								62	69	7	0.61
								82	88	6	0.63
BBGC0125	RC	299871	6567540	437	90	-60	90	19	21	2	0.94
								26	32	6	1.06
								39	40	1	0.77
								62	64	2	0.58
								72	87	15	0.82
BBGC0126	RC	299880	6567540	437	85	-60	91	0	1	1	0.62
								22	23	1	0.95
								26	27	1	0.72
								47	49	2	1.00
								64	65	1	0.57
BBGC0127	RC	299891	6567540	437	85	-60	90	76	84	8	1.23
								12	33	21	1.16
								inc. 1m @ 12.7g/t Au from 12m			
								57	62	5	0.54
								64	65	1	0.85
BBGC0128	RC	299900	6567540	437	80	-60	90	74	78	4	1.78
								35	38	3	0.94
								54	60	6	0.78
								70	73	3	0.95
								20	21	1	0.94
BBGC0129	RC	299910	6567540	437	75	-60	89	37	40	3	0.73
								52	54	2	0.90
								63	70	7	1.08
								47	52	5	0.69
								59	63	4	0.59
BBGC0130	RC	299921	6567539	436	70	-61	89	36	43	7	0.55
								53	59	6	0.98
								35	38	3	0.55
								41	42	1	0.56
								44	45	1	0.77
BBGC0131	RC	299930	6567540	436	70	-60	89	54	59	5	0.76
								33	37	4	1.15
								43	51	8	1.08
								38	47	9	0.88
								40	43	3	1.46
BBGC0132	RC	299940	6567540	436	65	-60	91	32	34	2	9.78
								inc. 1m @ 17.6g/t Au from 32m			
								40	42	2	2.34
								38	39	1	0.74
								45	51	6	1.06
BBGC0133	RC	299950	6567540	437	60	-60	91	56	57	1	0.59
								73	75	2	0.81
								81	82	1	0.99
								35	45	10	0.94
								50	51	1	0.60
BBGC0134	RC	299960	6567540	438	55	-60	88	76	77	1	0.81
								83	84	1	0.72
								30	49	19	0.73
								65	66	1	0.72
								76	81	5	0.58
BBGC0135	RC	299970	6567540	438	50	-60	89	30	36	6	0.80
								41	42	1	0.83
								48	49	1	0.51
								64	67	3	0.55
								49	50	1	1.07
BBGC0136	RC	299981	6567540	439	50	-60	90	58	59	1	1.31
								66	67	1	1.03
								78	80	2	0.63
								84	85	1	0.65
								48	49	1	1.04
BBGC0137	RC	299982	6567551	435	90	-60	91	58	60	2	1.14
								30	49	19	0.73
								65	66	1	0.72
								76	81	5	0.58
								30	36	6	0.80
BBGC0138	RC	299801	6567550	435	90	-60	89	41	42	1	0.83
								48	49	1	0.51
								64	67	3	0.55
								49	50	1	1.07
								58	59	1	1.31
BBGC0139	RC	299811	6567551	435	90	-60	91	66	67	1	1.03
								78	80	2	0.63
								84	85	1	0.65
								48	49	1	1.04
								58	60	2	1.14
BBGC0140	RC	299821	6567551	436	90	-61	91	48	49	1	1.04
								58	60	2	1.14
								48	49	1	1.04
								58	60	2	1.14
								48	49	1	1.04
BBGC0141	RC	299831	6567551	436	90	-60	90	48	49	1	1.04
								58	60	2	1.14
								48	49	1	1.04
								58	60	2	1.14
								48	49	1	1.04
BBGC0142	RC	299840	6567550	437	90	-60	91	48	49	1	1.04
								58	60	2	1.14
								48	49	1	1.04
								58	60	2	1.14
								48	49	1	1.04

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								73	75	2	0.95
								80	81	1	0.76
								84	85	1	0.58
BBGC0143	RC	299850	6567550	437	90	-61	90	27	30	3	0.62
								33	34	1	0.71
								47	48	1	1.49
								52	55	3	0.73
								69	71	2	0.80
								82	84	2	0.71
								89	90	1	0.52
BBGC0144	RC	299861	6567551	437	90	-60	91	26	27	1	0.71
								32	33	1	0.88
								45	47	2	1.99
								66	68	2	1.29
								80	86	6	0.67
BBGC0145	RC	299871	6567551	437	90	-60	90	26	28	2	0.70
								47	49	2	0.54
								59	64	5	0.73
								78	86	8	0.55
BBGC0146	RC	299880	6567550	437	85	-60	91	20	21	1	0.64
								30	31	1	0.65
								60	61	1	0.56
								71	73	2	0.94
								77	81	4	1.11
BBGC0147	RC	299890	6567550	437	80	-60	90	0	1	1	0.67
								12	13	1	0.59
								24	25	1	1.28
								31	34	3	0.66
								56	62	6	0.50
								72	76	4	2.28
BBGC0148	RC	299900	6567550	437	75	-60	90	16	21	5	0.59
								28	33	5	1.65
								56	57	1	0.50
								66	71	5	0.82
BBGC0149	RC	299910	6567550	437	70	-60	90	48	49	1	0.75
								51	54	3	0.56
								62	67	5	3.79
								inc. 1m @ 15.5g/t Au from 65m			
BBGC0150	RC	299921	6567550	437	65	-60	90	21	22	1	0.57
								40	63	23	0.57
BBGC0151	RC	299931	6567550	437	65	-60	91	35	55	20	0.79
BBGC0152	RC	299940	6567550	437	60	-60	88	31	37	6	0.76
								48	53	5	0.78
BBGC0153	RC	299950	6567549	438	55	-60	90	29	38	9	0.62
								43	49	6	0.72
BBGC0154	RC	299960	6567549	438	50	-60	90	25	31	6	0.78
								38	45	7	0.79
BBGC0155	RC	299801	6567560	435	90	-60	89	29	32	3	0.83
								36	54	18	1.42
								67	68	1	1.51
								74	75	1	0.74
								83	86	3	0.72
BBGC0156	RC	299811	6567560	435	90	-61	91	32	49	17	0.69
								66	67	1	0.69
								75	78	3	0.79
								85	88	3	0.77
BBGC0157	RC	299821	6567560	436	90	-60	89	29	31	2	1.09
								35	36	1	1.10
								68	72	4	2.06
								77	80	3	0.96
								87	89	2	7.44
								inc. 1m @ 13.7g/t Au from 87m			
BBGC0158	RC	299831	6567560	436	90	-60	91	47	49	2	1.00
								54	59	5	0.95

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
BBGC0159	RC	299841	6567560	436	90	-60	91	24	25	1	0.95
								36	41	5	0.53
								74	75	1	2.79
								82	83	1	2.42
								88	89	1	1.75
BBGC0160	RC	299850	6567560	437	90	-60	89	70	72	2	2.55
								80	81	1	0.57
								87	89	2	0.75
BBGC0161	RC	299861	6567560	437	90	-60	90	26	27	1	0.56
								40	41	1	0.55
								47	52	5	0.62
								60	66	6	0.66
								82	83	1	1.99
BBGC0162	RC	299870	6567560	437	90	-60	87	25	27	2	0.60
								44	51	7	0.77
								67	68	1	0.95
								74	88	14	0.95
BBGC0163	RC	299881	6567560	438	85	-60	90	0	1	1	0.53
								19	20	1	1.08
								24	25	1	0.67
								43	46	3	1.54
								73	80	7	0.86
BBGC0164	RC	299890	6567560	438	80	-60	88	22	26	4	0.53
								30	35	5	0.50
								37	38	1	0.53
								48	49	1	0.50
								54	55	1	0.58
								69	74	5	2.05
								79	80	1	0.58
BBGC0165	RC	299900	6567560	438	75	-61	90	32	33	1	3.09
								48	49	1	0.54
								51	53	2	0.62
								57	70	13	0.60
BBGC0166	RC	299910	6567560	438	70	-60	91	25	26	1	0.68
								44	50	6	0.60
								60	65	5	1.72
BBGC0167	RC	299920	6567561	438	65	-60	90	37	46	9	0.78
								55	61	6	1.31
BBGC0168	RC	299931	6567560	438	60	-60	89	36	42	6	1.34
								47	56	9	0.79
BBGC0169	RC	299940	6567560	438	55	-60	90	34	41	7	0.67
								45	49	4	0.69
BBGC0170	RC	299950	6567560	438	55	-60	90	33	50	17	0.63
BBGC0171	RC	299960	6567560	439	50	-60	89	34	35	1	0.55
								39	43	4	1.29
BBGC0172	RC	299970	6567560	439	50	-60	90	No significant results			
BBGC0173	RC	299990	6568300	451	95	-60	90	16	20	4	3.08
								44	45	1	0.53
								46	47	1	0.52
								51	53	2	1.12
								66	67	1	0.55
								71	72	1	1.10
								83	93	10	1.63
BBGC0174	RC	299991	6568280	450	95	-60	89	inc. 1m @ 12.0g/t Au from 91m			
								38	46	8	0.84
								57	58	1	1.13
BBGC0175	RC	300001	6568279	450	95	-60	90	78	81	3	0.80
								38	39	1	0.70
								43	44	1	0.61
								49	56	7	0.93
								75	78	3	0.64
BBGC0176	RC	300010	6568280	450	95	-60	89	89	90	1	0.59
								40	41	1	0.99
								46	58	12	0.64

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
BBGC0177	RC	300020	6568280	450	95	-61	89	74	77	3	0.77
								40	56	16	1.22
								60	63	3	0.58
								68	76	8	0.98
BBGC0178	RC	300030	6568280	450	95	-61	90	11	14	3	1.19
								31	32	1	0.56
								40	51	11	0.77
								56	57	1	0.97
								62	63	1	1.77
								68	69	1	0.70
BBGC0179	RC	300040	6568280	450	95	-60	90	22	27	5	0.76
								41	50	9	0.99
								56	57	1	0.88
								63	71	8	0.77
								92	93	1	0.61
BBGC0180	RC	300051	6568280	450	95	-60	89	20	27	7	1.03
								50	57	7	0.51
								63	69	6	1.26
								79	80	1	0.65
								82	83	1	0.77
BBGC0181	RC	300060	6568280	449	95	-61	92	19	20	1	0.84
								21	22	1	0.50
								39	42	3	1.02
								53	56	3	0.56
								60	65	5	1.04
								92	93	1	0.52
BBGC0182	RC	300071	6568280	450	95	-60	89	17	18	1	1.22
								37	40	3	0.63
								49	51	2	0.83
								56	61	5	0.98
								81	88	7	1.48
								92	93	1	1.11
BBGC0183	RC	300080	6568280	450	95	-60	90	43	46	3	2.56
								51	58	7	0.71
								71	76	5	0.52
								84	85	1	0.97
BBGC0184	RC	300090	6568280	449	95	-60	90	27	40	13	0.66
								44	56	12	0.77
								64	65	1	0.64
								75	78	3	0.81
								87	90	3	0.57
BBGC0185	RC	300100	6568280	449	90	-60	89	28	32	4	1.31
								36	42	6	1.15
								65	66	1	2.22
								71	72	1	0.50
								82	83	1	0.57
BBGC0186	RC	300111	6568280	450	85	-60	88	18	25	7	0.63
								29	36	7	1.00
								44	45	1	0.65
								47	48	1	0.63
								49	50	1	0.57
								72	73	1	0.69
								76	77	1	0.59
BBGC0187	RC	300120	6568280	449	80	-60	90	0	2	2	0.69
								15	30	15	0.59
								36	37	1	0.69
								55	56	1	0.75
								61	64	3	0.56
								70	71	1	1.11
BBGC0188	RC	300131	6568280	449	75	-60	90	22	24	2	0.59
								54	55	1	3.38
								59	60	1	6.78
								68	70	2	0.98
BBGC0189	RC	300140	6568280	449	70	-60	87	16	17	1	0.84

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								23	24	1	1.23
								31	36	5	0.72
BBGC0190	RC	300150	6568279	449	65	-60	89	22	23	1	0.60
								32	33	1	0.80
								43	44	1	0.62
								60	61	1	1.00
BBGC0191	RC	299991	6568290	450	95	-60	90	14	15	1	1.13
								41	50	9	0.52
								59	60	1	1.22
								65	66	1	1.27
								82	85	3	2.24
								90	92	2	0.61
BBGC0192	RC	300001	6568290	450	95	-61	90	23	24	1	1.02
								40	42	2	0.75
								46	47	1	2.65
								54	64	10	0.67
								80	83	3	7.14
								inc. 1m @ 15.4g/t Au from 81m			
BBGC0193	RC	300010	6568290	450	95	-60	91	87	90	3	0.60
								52	62	10	0.76
								67	69	2	1.48
								76	79	3	1.15
BBGC0194	RC	300019	6568290	450	95	-60	90	51	60	9	1.17
								64	66	2	0.96
								74	77	3	1.39
BBGC0195	RC	300030	6568290	450	95	-60	90	31	35	4	0.96
								46	57	11	1.22
								70	76	6	0.91
BBGC0196	RC	300040	6568291	450	95	-60	90	17	18	1	0.62
								26	31	5	1.73
								38	54	16	0.89
								58	67	9	0.57
								71	76	5	0.82
BBGC0197	RC	300050	6568291	450	95	-60	91	22	28	6	1.22
								35	36	1	0.53
								45	46	1	0.54
								51	60	9	0.54
								66	73	7	0.70
								91	92	1	1.00
BBGC0198	RC	300060	6568291	450	95	-60	90	14	15	1	0.71
								19	31	12	3.51
								inc. 1m @ 30.6g/t Au from 19m			
								42	43	1	0.80
BBGC0199	RC	300070	6568291	450	95	-60	90	59	69	10	1.12
								12	16	4	0.90
								40	42	2	1.90
								52	65	13	0.76
								85	86	1	0.62
BBGC0200	RC	300081	6568291	450	95	-59	90	89	90	1	1.04
								8	15	7	0.92
								33	38	5	0.53
								48	59	11	0.99
								76	77	1	0.75
BBGC0201	RC	300091	6568290	450	95	-60	90	90	92	2	0.63
								11	12	1	0.77
								19	20	1	0.62
								41	52	11	1.01
								60	61	1	0.94
BBGC0202	RC	300101	6568290	450	95	-60	90	83	84	1	1.94
								24	26	2	0.97
								32	45	13	1.30
								54	55	1	0.69
								74	75	1	1.08
								85	86	1	6.21

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
BBGC0203	RC	300110	6568290	450	85	-60	90	23	29	6	3.37
								inc. 1m @ 12.7g/t Au from 25m			
								34	41	7	3.10
								inc. 1m @ 14.6g/t Au from 37m			
								66	67	1	0.52
BBGC0204	RC	300121	6568290	450	80	-61	90	13	19	6	0.66
								27	36	9	0.84
BBGC0205	RC	300131	6568291	449	75	-60	90	19	27	8	0.62
								54	55	1	0.51
BBGC0206	RC	300140	6568290	449	65	-60	89	12	13	1	0.54
								18	19	1	0.50
								23	24	1	0.59
								33	34	1	0.51
								37	38	1	0.95
								45	47	2	0.58
BBGC0207	RC	300150	6568291	449	55	-60	90	50	51	1	0.80
								30	31	1	0.55
BBGC0208	RC	300160	6568291	449	55	-60	89	38	44	6	0.62
								24	26	2	0.58
								33	34	1	0.72
								37	38	1	0.54
								44	46	2	0.70
BBGC0209	RC	300001	6568300	450	95	-60	89	54	55	1	0.50
								49	50	1	0.75
								59	68	9	1.57
								76	77	1	1.25
BBGC0210	RC	300011	6568300	450	95	-60	90	82	87	5	0.54
								53	54	1	0.80
								59	73	14	1.56
								inc. 1m @ 14.6g/t Au from 68m			
								81	84	3	0.95
BBGC0211	RC	300021	6568300	450	95	-60	90	43	44	1	1.22
								47	48	1	0.62
								58	71	13	0.77
								76	84	8	0.89
BBGC0212	RC	300031	6568300	451	95	-60	89	20	21	1	0.95
								32	39	7	0.99
								44	45	1	0.80
								50	51	1	0.53
								56	64	8	1.08
								75	82	7	1.38
BBGC0213	RC	300041	6568300	450	95	-61	90	22	23	1	1.09
								27	36	9	0.74
								42	64	22	0.62
								71	76	5	0.83
								90	91	1	1.98
BBGC0214	RC	300050	6568300	450	95	-60	90	26	34	8	0.91
								39	40	1	0.50
								43	44	1	0.51
								50	56	6	1.50
								61	62	1	1.04
								66	75	9	0.66
BBGC0215	RC	300060	6568300	451	95	-60	89	84	85	1	0.53
								24	29	5	3.18
								inc. 1m @ 13.1g/t Au from 24m			
								34	35	1	0.59
								46	52	6	0.59
								62	63	1	0.52
BBGC0216	RC	300071	6568300	451	95	-60	89	67	72	5	0.62
								80	83	3	0.53
								23	24	1	0.50
								29	30	1	0.82
								44	46	2	0.62
								51	52	1	0.56

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
BBGC0217	RC	300080	6568300	451	95	-61	90	62	67	5	1.09
								39	40	1	1.51
								57	62	5	1.03
								93	94	1	0.85
BBGC0218	RC	300091	6568300	450	90	-60	90	30	32	2	1.78
								44	56	12	0.84
BBGC0219	RC	300100	6568300	450	90	-61	90	25	26	1	0.51
								32	53	21	0.85
								59	61	2	1.58
								67	68	1	0.86
								80	83	3	0.85
BBGC0220	RC	300111	6568300	450	85	-60	90	26	33	7	1.80
								37	47	10	0.75
								66	74	8	0.62
BBGC0221	RC	300120	6568300	450	80	-60	89	18	26	8	1.06
								30	39	9	0.95
								51	52	1	0.63
								65	67	2	0.90
								77	78	1	0.56
BBGC0222	RC	300131	6568300	450	75	-61	89	13	14	1	0.90
								22	33	11	0.87
								53	57	4	0.80
								61	62	1	1.17
								67	68	1	0.70
BBGC0223	RC	300140	6568301	449	70	-61	90	14	16	2	1.03
								21	22	1	0.90
BBGC0224	RC	300150	6568301	449	65	-60	90	16	19	3	1.03
								41	48	7	0.61
BBGC0225	RC	300160	6568301	449	55	-60	89	52	53	1	0.68
								35	36	1	0.58
BBGC0226	RC	300001	6568310	451	95	-60	88	41	44	3	0.71
								62	78	16	0.66
								82	84	2	1.18
BBGC0227	RC	300010	6568310	451	95	-60	89	89	91	2	0.65
								25	26	1	0.59
								53	59	6	0.75
								63	74	11	0.84
								78	80	2	0.58
								85	89	4	1.57
BBGC0228	RC	300021	6568310	450	95	-60	89	93	94	1	0.73
								32	33	1	0.82
								50	51	1	0.60
								57	75	18	0.64
BBGC0229	RC	300031	6568310	451	95	-60	90	81	85	4	1.18
								17	19	2	0.94
								43	48	5	1.73
								53	54	1	0.74
								59	70	11	0.94
BBGC0230	RC	300041	6568310	451	95	-61	89	79	87	8	1.45
								35	42	7	0.58
								46	47	1	2.11
								58	65	7	0.51
								68	69	1	0.67
BBGC0231	RC	300051	6568310	451	95	-61	90	77	79	2	1.36
								1	2	1	0.63
								19	20	1	0.64
								30	36	6	0.63
								51	54	3	0.73
								58	61	3	0.89
BBGC0232	RC	300061	6568310	451	90	-60	90	71	77	6	0.93
								22	23	1	0.50
								29	42	13	0.54
								48	54	6	0.78
								67	75	8	0.84

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
BBGC0233A	RC	300072	6568310	451	85	-60	90	28	46	18	0.64
								60	67	7	0.64
								82	84	2	6.17
BBGC0234	RC	300080	6568310	451	80	-60	90	20	21	1	1.52
								33	34	1	1.28
								38	39	1	1.29
								47	48	1	0.52
								49	50	1	0.50
BBGC0235	RC	300091	6568310	451	75	-60	89	55	64	9	0.70
								29	33	4	0.84
								49	58	9	0.60
BBGC0236	RC	300100	6568310	451	75	-60	89	66	67	1	0.96
								12	14	2	1.08
								23	26	3	0.77
								38	53	15	0.73
BBGC0237	RC	300110	6568310	451	70	-60	90	71	72	1	0.52
								18	19	1	0.53
								25	35	10	0.99
								39	46	7	2.58
BBGC0238	RC	300121	6568310	450	65	-60	88	63	64	1	1.60
								20	28	8	1.29
								32	44	12	0.53
BBGC0239	RC	300130	6568310	450	65	-60	89	58	59	1	0.77
								10	21	11	0.79
								25	34	9	1.09
								44	45	1	1.00
BBGC0240	RC	300140	6568310	450	60	-59	89	60	64	4	0.71
								24	28	4	0.65
								55	58	3	0.60
BBGC0241	RC	300151	6568310	449	55	-60	90	10	12	2	1.27
								18	19	1	0.65
								41	42	1	0.83
								49	50	1	0.94
BBGC0242	RC	300160	6568310	449	55	-60	90	32	33	1	0.54
								37	39	2	0.63
								44	45	1	0.70
BBGC0243	RC	300171	6568310	448	55	-60	89	21	22	1	0.76
								30	31	1	0.81
								37	38	1	1.02
BBGC0244	RC	300181	6568310	448	50	-60	90	23	25	2	0.64
BBGC0245	RC	300190	6568310	449	45	-60	90	24	25	1	0.56
BBGC0246	RC	300200	6568310	449	40	-60	89	19	20	1	0.63
								29	36	7	0.72
BBGC0247	RC	300001	6568320	451	95	-60	90	0	1	1	0.59
								21	22	1	0.57
								26	27	1	0.53
								36	38	2	3.44
								53	54	1	1.31
								57	58	1	0.59
								67	83	16	1.41
								inc. 1m @ 13.3g/t Au from 73m			
BBGC0248	RC	300011	6568320	451	95	-61	88	93	94	1	1.21
								23	25	2	15.68
								inc. 1m @ 30.6g/t Au from 23m			
								59	76	17	0.70
								80	81	1	0.69
BBGC0249	RC	300020	6568320	451	95	-61	89	87	94	7	0.54
								19	27	8	1.71
								48	49	1	0.86
								57	64	7	0.90
								68	78	10	2.20
BBGC0250	RC	300031	6568320	451	95	-60	90	inc. 1m @ 16.5g/t Au from 71m			
								86	90	4	0.96
								19	20	1	7.72

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								29	36	7	0.55
								45	46	1	1.01
								55	86	31	0.96
BBGC0251	RC	300041	6568320	451	95	-61	90	8	9	1	1.38
								16	20	4	1.09
								30	31	1	0.63
								40	50	10	0.65
								58	69	11	0.93
								75	80	5	0.70
BBGC0252	RC	300051	6568320	451	95	-61	91	14	15	1	0.57
								30	44	14	0.69
								52	62	10	0.66
								74	76	2	1.41
BBGC0253	RC	300060	6568320	451	95	-60	91	28	35	7	2.66
								inc. 1m @ 13.0g/t Au from 28m			
								44	54	10	0.83
								62	63	1	0.53
								70	74	4	0.79
BBGC0254	RC	300071	6568320	451	95	-61	90	22	31	9	1.18
								35	45	10	0.71
								49	50	1	1.81
								63	68	5	0.76
BBGC0255	RC	300080	6568320	451	85	-61	90	81	85	4	0.95
								25	26	1	0.65
								34	42	8	0.97
								47	50	3	0.74
								56	69	13	1.46
BBGC0256	RC	300091	6568320	451	80	-61	91	inc. 1m @ 13.8g/t Au from 68m			
								18	19	1	1.17
								22	23	1	0.73
								36	37	1	0.52
								44	45	1	3.94
								51	60	9	0.72
BBGC0257	RC	300102	6568320	451	75	-60	90	20	21	1	0.65
								25	26	1	1.22
								31	32	1	0.54
								33	34	1	0.74
								41	42	1	0.51
								48	54	6	1.20
BBGC0258	RC	300111	6568320	450	75	-61	90	19	24	5	0.73
								30	37	7	0.88
								41	48	7	1.23
BBGC0259	RC	300122	6568320	450	70	-61	90	67	68	1	0.81
								20	44	24	1.36
BBGC0260	RC	300131	6568320	450	65	-60	90	68	70	2	1.11
								14	15	1	0.54
								20	36	16	1.34
								inc. 1m @ 10.5g/t Au from 32m			
								53	54	1	0.55
BBGC0261	RC	300141	6568320	450	60	-61	90	62	65	3	0.58
								8	16	8	1.15
								21	32	11	0.77
BBGC0262	RC	300151	6568320	450	55	-60	92	54	59	5	0.58
								15	17	2	0.63
								21	25	4	0.88
								33	34	1	1.03
BBGC0263	RC	300161	6568320	449	50	-60	89	50	51	1	1.00
BBGC0264	RC	300171	6568320	449	50	-60	91	18	19	1	1.60
BBGC0265	RC	300181	6568320	448	45	-61	90	31	36	5	2.36
								20	21	1	3.03
BBGC0266	RC	300000	6568330	452	95	-60	89	30	31	1	0.67
								24	25	1	0.54
								36	37	1	1.28
								55	60	5	2.27

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								67	81	14	1.08
								89	90	1	0.53
								93	94	1	1.36
								19	25	6	17.07
								inc. 2m @ 45.0g/t Au from 20m			
								35	36	1	0.76
								66	87	21	0.77
								92	95	3	0.62
								16	17	1	0.97
								26	27	1	0.67
								31	32	1	0.61
								56	58	2	0.96
								62	82	20	0.75
								91	94	3	1.74
								19	25	6	1.17
								37	38	1	0.55
								50	51	1	0.66
								59	77	18	1.21
								87	95	8	0.76
								16	18	2	2.81
								24	25	1	2.48
								30	35	5	1.06
								42	46	4	6.42
								inc. 1m @ 24.3g/t Au from 43m			
								51	52	1	0.83
								59	74	15	0.75
								83	86	3	0.77
								5	6	1	0.73
								22	23	1	1.52
								35	37	2	3.06
								42	43	1	1.79
								48	66	18	0.72
								76	79	3	0.87
								34	38	4	1.30
								47	59	12	0.71
								72	74	2	2.58
								28	32	4	2.17
								39	48	9	0.89
								52	53	1	2.07
								66	70	4	1.23
								94	95	1	0.52
								24	29	5	1.93
								35	45	10	1.13
								52	53	1	0.51
								58	67	9	0.71
								82	83	1	0.86
								91	92	1	0.81
								30	36	6	0.69
								50	62	12	0.53
								75	77	2	0.58
								91	93	2	10.39
								inc. 1m @ 19.9g/t Au from 91m			
								18	19	1	0.56
								23	24	1	1.03
								37	38	1	2.58
								46	56	10	1.01
								84	87	3	1.96
								17	18	1	0.76
								23	24	1	0.92
								29	30	1	0.64
								36	37	1	2.17
								43	50	7	2.16
								inc. 1m @ 11.2g/t Au from 44m			
								81	82	1	1.20

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
BBGC0278	RC	300121	6568330	450	95	-60	89	89	95	6	0.66
								26	44	18	0.97
								62	63	1	0.50
								70	75	5	0.55
								85	86	1	0.62
								92	93	1	2.11
BBGC0279	RC	300131	6568330	450	90	-61	90	16	28	12	1.53
								32	36	4	0.57
								78	79	1	2.42
								85	88	3	1.42
BBGC0280	RC	300141	6568330	450	85	-61	89	14	23	9	0.96
								27	36	9	0.62
								48	49	1	1.95
								58	61	3	1.21
BBGC0281	RC	300151	6568330	450	80	-61	89	12	14	2	1.23
								19	30	11	1.01
								42	43	1	0.63
								51	52	1	0.69
								55	56	1	0.97
								72	76	4	0.63
BBGC0282	RC	300161	6568330	450	75	-61	90	14	15	1	0.99
								20	24	4	2.31
								74	75	1	0.51
BBGC0283	RC	300171	6568330	450	70	-60	91	13	14	1	0.69
								30	31	1	0.96
								37	42	5	0.66
								52	54	2	0.60
								66	69	3	0.93
BBGC0284	RC	300181	6568330	449	55	-60	90	24	25	1	0.52
								32	33	1	0.58
BBGC0285	RC	300000	6568340	452	95	-60	90	22	28	6	10.00
								inc. 2m @ 24.0g/t Au from 23m			
								36	41	5	0.50
								46	47	1	1.49
								53	54	1	0.65
								73	81	8	0.75
								85	87	2	0.94
								94	95	1	0.71
BBGC0286	RC	300010	6568340	452	95	-59	91	18	19	1	0.62
								33	38	5	2.50
								58	59	1	0.62
								62	63	1	0.74
								66	67	1	0.95
								72	83	11	0.61
								89	90	1	0.72
								94	95	1	22.92
BBGC0287	RC	300020	6568340	452	95	-61	91	inc. 1m @ 22.9g/t Au from 94m			
								16	17	1	6.54
								24	25	1	0.56
								61	85	24	0.90
								94	95	1	0.58
BBGC0288	RC	300030	6568340	452	95	-60	91	0	2	2	0.85
								10	12	2	0.68
								33	34	1	0.82
								55	81	26	1.26
								inc. 1m @ 10.8g/t Au from 73m			
								90	92	2	1.08
BBGC0289	RC	300040	6568340	452	95	-60	90	19	20	1	1.36
								35	36	1	0.56
								38	39	1	1.06
								52	56	4	1.27
								60	72	12	0.78
								84	88	4	1.13
BBGC0290	RC	300051	6568340	452	95	-60	89	0	1	1	0.55

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								29	30	1	0.50
								31	32	1	0.70
								37	40	3	1.09
								44	47	3	1.34
								53	72	19	0.57
								79	83	4	0.63
								86	87	1	1.03
								94	95	1	1.23
BBGC0291	RC	300060	6568340	452	95	-61	90	4	5	1	3.51
								24	25	1	1.70
								33	39	6	0.75
								47	62	15	0.55
								65	66	1	0.57
								75	76	1	0.97
								90	94	4	1.20
BBGC0292	RC	300071	6568340	452	95	-61	89	31	32	1	1.43
								42	51	9	0.58
								68	70	2	1.57
								87	88	1	0.98
BBGC0293	RC	300081	6568340	452	95	-61	89	17	18	1	1.07
								23	27	4	1.29
								32	39	7	0.85
								62	66	4	1.17
								93	94	1	1.29
BBGC0294	RC	300091	6568340	453	95	-60	91	15	34	19	0.81
								45	46	1	0.67
								50	51	1	0.69
								55	61	6	0.99
BBGC0295	RC	300101	6568339	452	95	-60	92	12	13	1	0.74
								38	39	1	0.53
								47	55	8	0.86
								86	90	4	0.51
								92	93	1	0.50
BBGC0296	RC	300111	6568340	452	95	-60	91	15	16	1	0.69
								39	51	12	1.59
								inc. 1m @ 10.4g/t Au from 39m			
BBGC0297	RC	300122	6568340	451	95	-61	92	26	27	1	0.93
								31	45	14	1.18
								89	90	1	0.62
								92	93	1	0.50
BBGC0298	RC	300131	6568340	451	95	-62	92	20	35	15	0.92
								39	40	1	2.14
								58	59	1	0.51
								67	71	4	0.62
								86	87	1	0.54
								94	95	1	0.81
BBGC0299	RC	300141	6568340	451	85	-61	90	21	25	4	1.50
								30	36	6	1.08
								50	51	1	0.51
								61	63	2	0.76
								72	77	5	0.54
BBGC0300	RC	300151	6568340	450	80	-60	90	14	28	14	0.58
								32	33	1	0.87
								54	56	2	1.24
								60	61	1	0.58
								67	68	1	0.76
								78	79	1	0.62
BBGC0301	RC	300161	6568340	450	75	-61	90	10	12	2	2.05
								21	27	6	0.86
								41	42	1	0.64
								47	48	1	0.68
								51	52	1	0.52
								61	66	5	0.73
BBGC0302	RC	300171	6568340	450	70	-61	89	14	15	1	0.52

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								19	21	2	0.58
								43	45	2	1.06
								55	56	1	0.92
								65	66	1	0.58
								36	37	1	0.50
BBGC0303	RC	300181	6568340	450	60	-61	90	46	51	5	0.64
BBGC0304	RC	300020	6568350	453	95	-60	89	0	1	1	1.06
								13	16	3	1.09
								26	27	1	12.16
								inc. 1m @ 12.2g/t Au from 26m			
								35	36	1	0.87
BBGC0305	RC	300030	6568350	453	95	-60	89	66	88	22	1.05
								0	1	1	0.53
								16	18	2	2.33
								24	27	3	13.50
								inc. 1m @ 39.0g/t Au from 25m			
BBGC0306	RC	300041	6568350	453	95	-60	90	39	40	1	0.59
								58	79	21	1.98
								inc. 1m @ 23.9g/t Au from 63m			
								89	95	6	0.58
								1	2	1	1.23
BBGC0307	RC	300051	6568350	452	95	-60	88	23	24	1	1.22
								29	30	1	4.03
								51	52	1	0.52
								56	79	23	1.07
								85	90	5	0.83
BBGC0308	RC	300060	6568350	452	95	-60	89	3	4	1	0.50
								5	6	1	0.53
								19	20	1	2.05
								28	29	1	28.16
								inc. 1m @ 28.2g/t Au from 28m			
BBGC0309	RC	300071	6568350	452	95	-60	89	45	71	26	1.20
								82	86	4	0.87
								3	4	1	1.33
								5	6	1	0.95
								12	21	9	0.97
BBGC0310	RC	300080	6568350	452	95	-61	90	25	26	1	1.41
								41	42	1	1.36
								49	54	5	0.89
								59	64	5	0.89
								77	80	3	0.78
BBGC0311	RC	300090	6568350	453	95	-61	90	90	94	4	1.11
								33	34	1	0.56
								40	54	14	0.92
								68	75	7	0.69
								80	81	1	0.54
BBGC0312	RC	300101	6568350	453	95	-61	89	87	91	4	1.49
								8	11	3	1.54
								22	27	5	2.22
								37	40	3	1.18
								49	50	1	1.04
BBGC0313	RC	300110	6568350	452	95	-61	88	62	67	5	0.83
								21	22	1	0.79
								31	44	13	0.80
								48	50	2	1.14
								60	64	4	0.63

Hole_ID	Hole Type	East	North	RL	Depth (m)	Dip	Azimuth	From (m)	To (m)	Significant Intercepts	
										Gold (>0.5g/t)	
										Interval (m)	Grade (g/t)
								26	27	1	0.54
								37	54	17	0.84
								59	60	1	0.69
								83	92	9	0.59
BBGC0314	RC	300121	6568350	451	95	-61	89	0	1	1	0.78
								10	13	3	1.01
								21	22	1	1.42
								31	47	16	0.62
								56	57	1	0.69
								91	95	4	2.51
BBGC0315	RC	300130	6568350	451	95	-60	88	23	24	1	0.50
								29	32	3	1.07
								37	43	6	1.42
								48	49	1	0.53
								70	75	5	0.61
								86	93	7	0.72
BBGC0316	RC	300150	6568350	451	80	-61	89	13	14	1	1.37
								19	32	13	1.05
								56	62	6	1.23
								79	80	1	0.83
BBGC0317	RC	300158	6568350	451	80	-60	88	13	22	9	0.54
								26	31	5	0.52
								48	49	1	0.50
								53	56	3	0.61
								72	75	3	1.22
BBGC0318	RC	300170	6568350	450	70	-60	89	7	9	2	2.55
								13	18	5	0.52
								24	25	1	0.62
								38	39	1	0.57
								53	54	1	0.80
BBGC0319	RC	300180	6568350	450	65	-60	91	58	61	3	2.27
								18	19	1	0.59
								33	34	1	0.98
								39	43	4	0.65

Appendix 3 – Bullabulling Gold Project – JORC Code 2012 Table 1 Criteria

Section 1: Sampling Techniques and Data

The table below summarises the assessment and reporting criteria used for the Bullabulling Gold Project and reflects the guidelines in Table 1 of *The Australasian Code for the Reporting of Exploration Results, Mineral Resources and Ore Reserves* (the JORC Code, 2012).

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	The Bullabulling Mineral Resource estimate is based on 137 diamond core holes (NQ, HQ and PQ diameter) for a total of 20,302.3m, 76 RC pre-collars with diamond tails for 22,025.7m, and 6,020 reverse circulation (RC) drillholes (5.5" face-sampling hammer) for a total of 465,841.6m, drilled between 1985 and 2026 by various companies. This is a subset of the project database which comprises approximately 12,850 holes for a total of 698,000m, including AC, RAB and auger holes which were only utilised for geological interpretation where appropriate data was available. Approximately 65% of the holes used for estimation were drilled pre-2010 Minerals 260 Limited RC samples were collected by the metre from the drill rig in calico bags via a cone splitter with a bulk coarse reject sample collected in buckets and poured on the ground. 2–5 kg samples were collected from each metre of RC drilling with samples typically dry. Rock chips for logging were obtained by sieving a large scoop from each bag. Washed chips were placed into appropriately labelled chip trays. Cyclones regularly cleaned to remove hung-up clays and avoid cross-sample contamination. The coarse reject samples were weighed in small campaigns only, and the weight recorded in an Excel spreadsheet which was later entered into the database. Calico weights are recorded at the laboratory. Diamond core (HQ, NQ and PQ) sampled in intervals of ~1.0 m (with a minimum of 0.3 m) where possible, otherwise intervals less than 1.0 m selected based on geological boundaries. Drill core samples were typically half HQ and NQ. PQ core was reserved for metallurgical sampling. Samples of approximately 10 cm length were selected by the geologist and subject to bulk density measurements using the water displacement method. The core was cut in half parallel to the orientation mark, with one half retained and the other half sent to the laboratory for analysis. AC samples were collected by the metre in their entirety from the drill rig in calico bags. 1–5 kg samples were collected from each metre of AC drilling with samples typically dry. Rock chips for logging were obtained by inspecting the calico bags. Washed chips were placed into appropriately labelled chip trays. Auger samples were collected at the bottom of each hole, typically at 1.5 m below surface, at blade refusal, or upon identification of a regolith colour change. Samples were hand-sieved, and approximately 100 g of the -2 mm fraction was collected and submitted in brown paper geochemistry bags. For RC, AC, DD and Auger samples, entire samples were oven dried for 24 hours, weighed and pulverised with 85% <75µm. If the primary sample was larger than 3 kg it was split prior to pulverising. A 50 g charge is collected and subject to fire assay (Au-AA26) and analysed for gold using atomic absorption spectrometry (AAS). Grade control RC samples were dried, weighed, crushed with 85% passing 2-3mm, riffle split 500g into a single use jar. Samples were analysed using Chrysos PhotonAssay™, utilizing high-energy X-rays to activate atomic nuclei (Gamma Activation

	Analysis). Portable x-ray fluorescence (pXRF) determinations were performed to verify litho-geochemistry only using an Olympus Vanta portable analyser, which was regularly calibrated. All collars are initially collected via handheld GPS, with a surveyor to be commissioned to collect final coordinates via a differential global positioning system (GPS) (accuracy ± 0.1 m). Bullabulling Gold Limited (Bullabulling Gold) Sampling techniques are as per Minerals 260, other than the below: RC samples coarse reject sample collected in plastic mining bags. The coarse reject samples were weighed, and the weight recorded in a field book which was later entered into the database. Magnetic susceptibility was measured using a model KT-10 portable magnetic susceptibility metre with readings taken at 1 m intervals. Portable x-ray fluorescence (pXRF) determinations were performed to verify litho-geochemistry only using a PAS XL3t 950s GOLDD+ portable analyser, which was regularly calibrated. All collars surveyed by Fugro Spatial Solutions or ABIMS by differential global positioning system (GPS) (accuracy ± 0.1 m). Historical (pre-2000) Similar sampling practices with a riffle splitter utilised for RC sampling. No information is available on the sample preparation practices. Gold analysis was by a mixture of methods (fire assay and acid digest, acid digest only and bottle roll), followed by AAS finish. Ground Gravity (Minerals 260) The ground gravity survey was conducted by Atlas Geophysics between 21st July and 17th September 2026. 14,745 stations were collected at 50m spaced stations on 200m spaced lines. Lines were oriented east-west in the north half of the grid, and northeast-southwest in the southern half of the grid.
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> Drilling techniques from 1974 to 2026 includes: Aircore (AC) – standard 3.5" AC drill bit Rotary air blast (RAB) – standard 4.25" drill bit RC – 5.5" with face sampling hammer NQ2 DD core, standard tube HQ3 DD core, standard tube PQ3 DD core, standard tube. Auger – standard 3.5" auger drill bit AC and RAB holes were used to inform geological interpretations only in the resource estimate where appropriate data was available, or sterilisation programs. The drilling was typically aligned at -60° to the east, which is appropriate given the strike and dip of the mineralisation. The bulk of the drilling is RC with DD holes completed for bulk density determinations and metallurgical testing. Holes were drilled on a nominal 35 m x 75 m grid spacing historically, with 40m x 40m by Minerals 260. RC drillholes range in depth from 1 m to 348 m, averaging 59 m. Bullabulling Gold DD holes range in depth from 136 m to 573.5 m, averaging 355 m. Grade control holes were drilled on a 10 m x 10 m grid spacing, with a maximum depth of 180m and an average depth of 81m. DD holes were drilled directly from surface or from base of RC pre-collars. All Bullabulling Gold, DD core was oriented where possible using an ACT REFLEX (ACT II RD) tool. All Minerals 260 DD core is oriented with an Axis orientation tool. It is unknown how historical drill core was oriented and is assumed to be to industry standards.

Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	Sample recoveries for Bullabulling Gold's and Minerals 260's RC/AC drilling is visually estimated and recorded for each metre in Micromine Field Marshal (Bullabulling Gold), validated Excel logging software (M260 2025) and GeoBank (M260 2026 onwards). Analysis of historical results yielded an average recovery of 97%. For DD core, recovery was measured and recorded for every metre in Micromine Field Marshal software (Bullabulling Gold) or validated Excel logging software (M260 2025) and GeoBank (M260 2026 onwards). Diamond core recoveries averaged 99% for historical core.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	There is no recovery information available for the historical drilling. Minerals 260 RC/AC drill collars were sealed to prevent sample loss and holes were normally drilled dry to prevent poor recoveries and contamination caused by water ingress. For DD drillholes, core blocks were inserted in sections where core loss has occurred. This was recorded on the block and during the logging process and with photography of wet core.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No relationship between sample recovery and grade was noted.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	For RC and AC drilling, geological logging was undertaken on chip samples at 1 m intervals with lithology, oxidation strength, mineralogy, grain size, texture, colour, vein infill and percentage, metal sulphide percentage and alteration type and strength recorded. Geological logging, structural measurements, rock-quality designation (RQD) and recovery measurements were carried out on DD core. DD core was photographed wet and dry. Basic geology and colour logs were collected for auger samples. XRF determinations of lithophile elements nickel and chromium were utilised to confirm the visual identification of ultramafic or komatiitic units (Bullabulling Gold only).
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	The logging was quantitative, based on visual field estimates
	<i>The total length and percentage of the relevant intersections logged.</i>	All holes were logged from start to finish, and all logging was done with sufficient detail to meet the requirements of resource estimation and mining studies.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	DD core sample lengths were adjusted so that they did not cross lithological boundaries with ~1 m sample intervals ideally used. Samples are collected from half core cut using an onsite diamond saw. The remaining half core was stored as a library sample.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	Non-core samples were collected as 1 m samples. RC and AC samples were collected using a cone splitter (Bullabulling Gold and Minerals 260) or riffle splitter (historical) to cut the sample stream and produce a 2–5 kg sample. The entire samples was collected for some AC programs. Auger samples were hand sieved with ~100g of the -2mm component collected in brown paper geochemistry bags.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	Sample preparation followed industry best practice standards and was conducted by internationally recognised laboratories including ALS (2025-current) Intertek (current), Amdel, Jinning, Genalysis (2010-2014) and A.C.E. Laboratories Kalgoorlie and Broken Hill Minerals Southern Cross laboratory (pre-2010). Sample preparation included oven drying, jaw crushing and pulverising to 80% passing 75 µm.

	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Field duplicates were collected at a rate of 1 in 20 on average. A proportion of pulp duplicates were re- submitted for assay and then assayed by an umpire laboratory. Subsampling is performed during the preparation stage according to the laboratory's internal protocols.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Measures taken to ensure representative drill samples included: Regular cleaning of cyclones and sampling equipment to prevent contamination Statistical comparison of field and laboratory duplicates, standards and blanks Statistical comparison of anomalous composite assays versus average of follow up 1 m assays.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	The entire sample (2–5 kg) was submitted to the laboratory consistent with industry standards.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	Assay and laboratory procedures were selected following a review of techniques provided by internationally certified laboratories. Historical Pre-1994 samples were analysed for gold at A.C.E. Laboratories using a 24-hour bottle roll cyanide extraction technique with an AAS finish. Residues of all samples with solution reads greater than 0.4 g/t Au were assayed by Genalysis using the fire assay/AAS technique. Post-1994, samples were sent to Broken Hill Minerals Southern Cross laboratory who used an acid digest/AAS technique with a 0.01 g/t Au detection limit. Bullabulling Gold From June 2010 to December 2012, samples were assayed for gold at ALS facilities by the fire assay method (50 g charge 0.01 g/t Au detection limit). RC samples from five pre-collars in the first DD drilling program (June to August 2010) were assayed at ALS using by fire assay (30 g charge 0.002 g/t Au detection limit) and half core samples by fire assay (30 g charge 0.01 g/t Au detection limit). Solutions from samples assaying >10 g/t Au were diluted and reanalysed using method Au-DIL (Au overlimit by dilution). The final gold assay was selected in priority of Au-DIL then 50 g charge then 30 g charge. From January 2013 to April 2014, samples were assayed for gold at the Bureau Veritas laboratory in Kalgoorlie laboratory using a 40 g charge (0.01 g/t Au detection limit). The assay techniques used are total. Minerals 260 From April 2025, samples were assayed for gold at ALS facilities by the fire assay method (50 g charge 0.01 g/t Au detection limit), with ME-ICP61 and four acid digest for 34 elements: Ag, Al, As, Ba, Be, Bi, Ca, Cd, Co, Cr, Cu, Fe, Ga, K, La, Li, Mg, Mn, Mo, Na, Ni, P, Pb, S, Sb, Sc, Sr, Th, Ti, U, V, W, Zn. Grade control samples were analysed for gold at ALS and Intertek facilities by Photon Assay method (a nominal 500g split, 0.01 g/t Au detection limit) Bullabulling Gold performed XRF determinations to verify litho-geochemistry using a PAS XL3t 950s GOLDD+ handheld XRF (pXRF). The pXRF readings were not representative of grade intervals and are not reported. Minerals 260 use an Olympus Vanta pXRF to assist with litho-geochemistry. The pXRF readings were not representative of grade intervals and are not reported. The following instrumentation was used for acquisition of the gravity data: - Two CG-6 Autograv Gravity Meters (Serial Number: 21020321, SF: 1.000163), (Serial Number: 23110582, SF: 0.997541) - One CG-5 Autograv Gravity Meter (Serial Number:
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	

	40241, SF: 0.999743) • One CHCi70+ GNSS Base Receiver • Two ESVE300PRO_E31 GNSS Rover Receivers The gravity meters used for the survey had been recently calibrated on the Guildford Cemetery – Helena Valley Primary School calibration range (2010990117 - 2010990217) in Western Australia. The calibration process validated each gravity meter's scale factor to ensure reduction of the survey data produces correct Observed Gravities from measured dial reading values. prior to the program and all data were levelled against two gravity control stations on the project. Two new GNSS/gravity control stations 202606800001 "Bullabulling" and 202606800002 "Victoria Rock Road" were used to control all field observations throughout the project. Each loop contained a minimum of two repeated readings so that an interlocking network of closed loops was formed. A total of 473 repeat readings representing 3.21% of the survey were acquired for quality control purposes. Repeat readings were evenly distributed, where possible, on a time-basis throughout each of the gravity loops. Repeatability of the data was excellent, with the standard deviation of the elevation repeats at 0.013m and the standard deviation of the gravity repeats at 0.01m
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established</i> Historical Bullabulling Gold inserted field duplicates at a rate of 1 in 20 samples on average. A proportion of pulp duplicates were re-submitted for assay including assay by an umpire laboratory. Laboratory standards checked for accuracy and precision. No information is available on the historical quality control procedures and is assumed to be done to industry standards. Minerals 260 QAQC samples are inserted 1:10 samples, with a combination of blanks, certified reference materials and field duplicates. QAQC results are analysed monthly to ensure there is no bias in samples.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i> Intersections were peer reviewed in-house.
	<i>The use of twinned holes.</i> Initial analysis of the RC pairs shows no material systematic difference in gold grade between M260 grade control (2026) and historical drilling.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> Historical All Bullabulling Gold field data was manually collected, entered into Micromine Field Marshall software, validated in Micromine, and loaded into a commercial database (GBIS). All electronic data was routinely backed up. Data was exported as csv files for processing by several different software packages. No information is available on the historical data management and is assumed to be done to industry standards. Minerals 260 Data is collected and entered into validated Excel spreadsheets (2025) and Geobank (2026 onwards), validated in Micromine, and loaded into an DataShed database where additional checks are performed by an external contractor. Data is exported as an Access database to use in various software packages.
	<i>Discuss any adjustment to assay data.</i> There was no requirement to adjust assay data.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> The local mine grid was based on AMG Zone 51 coordinates up until 2014. From 2015 onwards GDA94/MGA Zone 51 was used including for the resource estimate. Nominal RLs based on regional topographic datasets were used initially; however, these were updated as differential GPS coordinates were collected. <i>Specification of the grid system used</i> Bullabulling Gold All collars were surveyed by Fugro Spatial Solutions or ABIMS by differential GPS (accuracy $\pm 0.1\text{m}$). A campaign of differential <i>Quality and adequacy of topographic control.</i>

	GPS surveys of surviving historical collars was undertaken by Fugro and results compared with the inherited database. Results indicated that the location data for historical drilling is accurate. Almost all drilling was subject to gyroscopic survey. No downhole surveys were undertaken on vertical holes. From January 2011 to April 2014, continuous downhole surveys were performed mainly in-rod by gyroscopic technique on the bulk of RC drillholes (85%). A proportion (13%) were surveyed down open hole. 24 holes where downhole surveys were unable to be performed relied on collar survey data for downhole traces. Historical Very few of the historical RC drillholes have downhole surveys and therefore rely on collar information. Historical DD holes have downhole survey information based on Eastman camera surveys, with minimal hole deviation noted. Collar surveys were completed by Spectrum Surveys and Datum Surveys using an unknown survey instrument. Coordinates were resurveyed to ensure accuracy, with Datum Survey data given preference, where available. Minerals 260 All AC, RC and DD collars are initially surveyed with handheld GPS (accuracy $\pm 5\text{m}$), with all drill collars to be picked up by an external surveyor using a differential GPS. Coordinates are collected in GDA94/MGA Zone 51 and GDA2020/MGA Zone 51. Auger coordinates are surveyed with handheld GPS (accuracy $\pm 5\text{m}$) in GDA94/MGA only. Downhole surveys for all holes are conducted with a True North Seeking Gyro, which is regularly calibrated. The Gravity data was positioned using the ESVE300PRO_E31 GNSS Rover Receivers operating in post-process kinematic (PPK) mode. Static data were logged at the control station with a base receiver operating in post-process static (PPS) mode. GNSS control was established at control stations 202606800001 and 202606800002 by submitting three 10-hour sessions of static data to Geoscience Australia's AUSPOS processing system, where possible, producing first-order geodetic coordinates. These coordinates are accurate to better than 10mm for the x, y, and z observables. Gravity control was established at station 202606800001 and 202606800002 via ABABA ties to Australian Fundamental Gravity Network (AFGN) control station 20150909613 "Coolgardie AFGN". Standard deviation for the tie loops for each new control station is 0.001mGal.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> Historical Drilling of the main 7 km north-south Bullabulling mineralised trend was completed along a set of east-west trending sections. The section spacing typically ranges from 20 m x 20 m apart to 35 m x 75 m apart. Preliminary drilling of the northwest-southeast oriented portion of the mineralised trend over a strike length of 2 km was undertaken on east-west sections. From January 2013, infill drilling of the northwest-southeast oriented trend along the Kraken areas was completed on northeast-southwest trending sections orthogonal to the mineralised trend. Section spacing was maintained at 35 m x 75 m. Areas were classified as Indicated where there is infill drilling at 20–40 m along strike and 20 m on section and where the geological and grade continuity are robust. Areas with drill spacing 40–80 m along strike and/or along section were classified as Inferred. All laterite material was set to Inferred as the drilling is predominantly historical. Minerals 260 Infill and step out drilling is conducted at 40m along section and

		40 to 50m along strike. Exploration holes are completed on an 160 x 160m spacing initially, with infill holes drilled pending results. Grade control drilling was completed at 10 m x 10 m spacing. Ground gravity surveys were collected at 50m stations on 200m lines.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	The section spacing is sufficient to establish the degree of geological and grade continuity necessary to support the resource classifications applied. The spacing of holes is considered of sufficient density to provide an "Indicated" or "Inferred" classification under the JORC Code (2012).
	<i>Whether sample compositing has been applied.</i>	Historical No sample compositing was applied to historical drilling. Minerals 260 For intervals deemed to have a low potential of mineralisation based on surrounding data, samples are composited to 4m samples with the 1m samples retained. Samples are scooped off the drill pad and placed into a calico. If results are anomalous, the 1m samples are sent for analysis.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Drilling was angled typically at -60° to achieve the most representative intersections through mineralisation. Drilling of historic mining infrastructure was vertical. Ground gravity survey lines run perpendicular to stratigraphic strike: east–west in the north, northeast–southwest in the south.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	Drilling is typically oriented perpendicular to the interpreted strike of the geology and no bias is envisaged. No sampling bias was observed.
Sample security	<i>The measures taken to ensure sample security.</i>	Historical Bullabulling Gold's RC and DD core samples were collected from drill site and delivered by the company to either to ALS or Amdel in Kalgoorlie following standard chain of custody procedures. Core prepared for metallurgical testwork was stored at site and then freighted to ALS' metallurgical facility in Perth. Pulp samples are boxed and stored at site in locked sea containers. There is no available information on the historical sample security which is assumed to be done to industry standards. Minerals 260 RC, AC, DD and auger samples were collected from drill site and delivered by freight company to ALS in Perth following standard chain of custody procedures.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	In late 2011, a review of the ALS assay data was undertaken by contractor RSC who made a number of recommendations to improve laboratory practices. Following the review, the quality of the quality control samples submitted by Bullabulling Gold improved. In March 2025 and August 2026, an audit of ALS, Perth was conducted by Minerals 260 geologists to view laboratory practices and cleanliness. No issues were observed.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	The Bullabulling Project comprises of: The following tenements 100%-owned by Bullabulling Operations Pty Ltd (BOPL) and Minerals 260 Holdings Pty Ltd, which are wholly owned subsidiaries of Minerals 260 Limited: 9 granted Mining Leases (M15/1414, M15/483, M15/503, M15/529, M15/1878, M15/1879, M15/1880, M15/1881, M15/1939). 16 granted Exploration Licenses (E15/1392,

	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> E15/1485, E15/1744, E15/1756, E15/1760, E15/1783, E15/1798, E15/1831, E15/1867, E15/2111, E15/2112, E15/2113, E15/2114, E15/2117, E15/2118, E15/2156). 12 Exploration Licence Applications (E15/2150, E15/2165, E15/2168, E15/2170, E15/2172, E15/2176, E15/2182, E15/2183, E15/2184, E15/2185, E15/2186, E15/2187). 29 granted Miscellaneous Licences (L15/156, L15/157, L15/158, L15/196, L15/206, L15/218, L15/222, L15/328, L15/330, L15/331, L15/332, L15/333, L15/334, L15/335, L15/336, L15/339, L15/357, L15/358, L15/359, L15/499, L15/503, L15/505, L15/507, L15/509, L15/511), L15/529, L15/530, L15/531, L15/539. 13 Miscellaneous License Applications (L15/510, L15/512, L15/513, L15/514, L15/515, L15/516, L15/517, L15/518, L15/519, L15/520, L15/521, L15/522, L15/528). 11 granted Prospecting Licences (P15/6381, P15/6618, P15/6762, P15/6763, P15/6764, P15/6788, P15/6789, P15/7011, P15/7012, P15/6769, P15/6770). 5 Prospecting Licence Applications (P15/6971, P15/6972, P15/6973, P15/6993, P15/7010). The 26 granted Prospecting Licences subject to an option agreement are held by Belararox Limited (P15/6427, P15/6474 to P15/6492, P15/6559 to P15/6564). The following tenements held by Bullabulling Operations No. 2 Pty Ltd, a wholly owned subsidiary of Minerals 260, in Joint Venture with Geko Explore Pty Ltd: 80% owned: 2 granted Mining Licences (M15/467, M15/1083). 7 granted Exploration Licences (E15/1561, E15/1569, E15/1591, E15/1606, E15/1607, E15/2087, E15/2107). 9 granted Prospecting Licences (P15/6930, P15/6931, P15/6932, P15/6933, P15/6934, P15/6935, P15/6936, P15/6937, P15/6938). 60% owned: 1 granted Exploration Licence (E15/1612). 9 granted Mining Licences (M15/59, M15/549, M15/826, M15/901, M15/1035, M15/1260, M15/1454, M15/1791, M15/1807) 7 granted Prospecting Licences (P15/6363, P15/6375, P15/6376, P15/6877, P15/6939, P15/6940, P15/6941). The tenement package forms a largely contiguous, 1,542km² area located ~65 km southwest of Kalgoorlie, Western Australia. Several tenements are subject to royalties: Franco-Nevada Australia Pty Ltd – 3.9% gross royalty on all gold produced within the area covered by the tenements that contained the Bullabulling Mineral Resource Estimate announced in December 2025 and within 10km of the boundaries of those tenements. (see ASX announcement dated 14 Sep 2026 for more information). Vox Royalty Australia Pty Ltd – A\$10/fine ounce (or fine ounce equivalent) of gold produced (post the first 100,000 ounces produced) on M15/503 and M15/1414. The Bullabulling Project is largely contained within the Bullabulling Pastoral Lease owned by Bullabulling Operations Pty Ltd. The Bullabulling Pastoral Lease is held by Norton Gold Fields Pty Ltd. An Access and Compensation Deed has been executed with Norton Gold Fields Pty Ltd providing permission to access to the Bullabulling Pastoral Lease on completion of the transfer Bullabulling Operations Pty Ltd and Bullabulling Gold Pty Ltd has a Native Title Land Use Agreement in place.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> All granted licences are currently in good standing.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i> Ownership of the Bullabulling Project has changed several times since initial exploration work in the early 1970s. The major work phases included: Western Mining Corporation from 1974 to 1982: 150 RC holes were drilled to the north of the current Phoenix pit.

		Valiant Consolidated Ltd and Hill Minerals NL joint venture in 1985. Work included magnetic surveys, soil sampling and RC and RAB drilling which led to the discovery of the Bacchus deposit. Central Kalgoorlie Gold Mines NL explored the area north and south of the Great Eastern Highway at the same time focusing on the laterite gold mineralisation. Drilling confirmed the presence of lateritic and primary mineralisation and the existence of the Phoenix deposit. Samantha Gold NL purchased the project in 1993. The drilling database at the time consisted of 6,500 auger, RAB, AC, RC and DD holes. Samantha continued RC drilling focusing on the Bacchus and Phoenix areas. Samantha Gold became Resolute Samantha Limited and then Resolute Limited in 1996. Open pit mining commenced in 1995 and focused on the Bacchus and Phoenix areas. Small pits were also developed in the Hobbit and Dicksons areas exploiting supergene mineralisation. In 2002, Jervois Mining Limited acquired the project from Resolute and commenced a small heap leach operation. Jervois Mining Limited sold the project to Auzex Resources Limited in February 2010. Ongoing exploration was carried out under a joint venture with GGG Resources Plc. By February 2012, 696 holes (mostly RC) totalling 114,259 m had been drilled. Bullabulling Gold Limited was formed in April 2012 following GGG Resources purchase of Auzex Resources 50% interest in the project. A further 69 holes for 10,816 m of mostly RC drilling had been completed by April 2013 including resource updates in 2012 and 2013 and a prefeasibility study in 2013. In September 2014, Norton Gold Fields ("Norton") completed a takeover of Bullabulling Gold who in turn was acquired by Zijin Mining Group Co. Ltd in May 2015. Additional exploration and metallurgical drilling and testwork was completed along with a Mineral Resource update, mining studies and environmental surveys.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	The Bullabulling project is located within the Coolgardie Domain of the Kalgoorlie Terrane in the Archaean Yilgarn Craton of Western Australia. The greenstone sequences within Coolgardie Domain are bounded by the Zuleika Shear to the east and the Ida Fault to the west. The Kunanalling Shear Zone passes through the middle of the domain. The domain comprises a series of north-south striking mafic, ultramafic, felsic volcanic and sedimentary rocks which are extensively metamorphosed from multiple deformation phases ranging from greenschist to amphibolite facies metamorphism. The stratigraphy is generally dipping 30–40° to the west and is cut by numerous pegmatite/aplite dykes and sills. Variations in dip occur due to folding and occasional faulting. Gold mineralisation is hosted in a continuous sequence of amphibolite which strikes over approximately 8 km. The amphibolites range from hornblende-rich to quartz-rich and overlie an ultramafic basement. The Bullabulling trend is typified by a network of ductile high strain zones and folds that broadly parallel the stratigraphy and are the result of multiple deformation events. The structures have allowed fluid flow into the amphibolite sequence resulting in the deposition and remobilisation of gold.
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> • <i>easting and northing of the drill hole collar</i> • <i>elevation or RL (Reduced Level – elevation above sea level in metres) of</i>	Provided in Appendix 1 and Appendix 2

	the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length.	
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	Exploration drilling intercepts have been calculated using length-weighted average gold grades and a 0.5 g/t Au cut-off. No top cuts have been applied to reported grades. Resource composites are based on the geological interpretation and mineralised domains established for the July 2026 Mineral Resource Estimate. Composite intervals are constrained by interpreted geological and mineralisation boundaries rather than a fixed grade cut-off or minimum dilution criterion and may include lower-grade or sub-grade material within the interpreted mineralised domains. The Mineral Resource reporting cut-off grade is 0.35 g/t Au. Shorter intercepts with higher grades have been reported provided the grade (g/t Au) x thickness (m) is equal or greater than 1. N/A
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	The Bullabulling mineralisation parallels the stratigraphy where it dips at between 15° and 60° towards the west, averaging around 30°. Southeast of Kraken, the mineralisation is oriented about an open fold with the stratigraphy and strikes northwest-southeast with mineralisation dipping between 30° and 45° to the southwest. Drilling has been completed perpendicular to mineralisation with most holes orientated to the east and dipping at -60°. The true thickness of mineralisation is estimated at between 85% and 95% of the reported drillhole intercepts, unless otherwise stated.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Refer to Figures in body of the announcement
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All drilling results are reported in Appendix 1 and Appendix 2.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	All other substantive exploration data is reported in this announcement. Data were corrected to produce Spherical Cap Bouguer Anomalies for varying densities. A Bouguer density value of 2.20 grams per cubic centimetre (g/cc) was considered to be a reasonable average value for the project area. Terrain corrections have been completed to optimise accuracy of results. The results of this survey were merged with existing Company survey data sets. Various filters have been applied to the data grids to highlight gravity anomalism and were generated using various colour stretches.
Further work	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	Mineral 260 has the following activities planned for 2026: - RC and DD infill and extensional drilling at main deposit areas. - Gravity survey interpretations

- Initial testing of regional targets.
- Water bore drilling.
- Heritage and environmental surveys.
- Auger drilling
- Project development activities
- Stakeholder engagement and approvals submissions